

## Application

Beam style	well-defined, flat field profile projection
Suitable for	theatres, TV studios, architectural and commercial applications
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	2 – 15m

## Electrical specifications

Light source	150W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.7A @230V AC 1.45A @110V AC
Power consumption	160W at full power
Cable/connection	2m mains cable with fitted Neutrik power-con IN and OUT, supplied
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Construction	extruded aluminium and sheet steel
Mounting & suspension	steel stirrup 12mm centre hole + DIN mounting.
Handle	rear
Weight/Packed weight	16,8 kg / 19.2 kg
Colour frame	metal, 185 x 185mm, supplied

## Operational specifications

Focus adjustment	slide zoom controls (dia and softness) at side
Beam shaping	4 shutter blades, supplied; iris diaphragm, accessory
DMX channels / connection	1 to 3 ch / XLR5 connectors, IN/OUT
Colour	white, single source, no colour shift in fading
Dimming	manual, from rear panel or remote, 8 or 16 bits, via DMX
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available: Silent /Auto/Constant
Fade curve	2 curves (linear, square)
LED Frequency	16KHz - flicker-free
LCD display	set-up, dmx, monitor, diagnostic
RDM	integrated

## Optical specifications

Optical system	double condenser with variable zoom
LED array	150W, white, round-shaped, replaceable
Rated LED life	50,000 hours at 25°C, maintains 70% of original intensity
Beam colour temperature	3200K or 5600K
CRI (Colour Rendering Index)	>90

## Accessories

Metal colour frame	■ 20100106	□ 20100106B	■ 20100106C
Iris diaphragm	20100707	Gobo holder, A/B metal	20100807
Hook clamp	20100900	Safety bond	20101300

## Photometric data

Spot	3200K – 124 lm/W (at 1440mA)							
Beam dia.	2.1	3.2	4.3	5.4	6.4	7.5	8.6	m
Lux	3314	1473	828	530	369	271	207	
Distance	4	6	8	10	12	14	16	m

Flood						
Beam dia.	3.9	5.9	7.8	9.8	11.7	m
lux	1214	540	303	194	134	
Distance	4	6	8	10	12	m

Spot	5600K – 138 lm/W (at 1440mA)							
Beam dia.	2.1	3.2	4.3	5.4	6.4	7.5	8.6	m
Lux	TBA							
Distance	4	6	8	10	12	14	16	m


Flood						
Beam dia.	3.9	5.9	7.8	9.8	11.7	m
lux	TBA					
Distance	4	6	8	10	12	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# arpa 30/55

150W, 100/260VAC, DMX512 + RDM  
very wide-angle LED profile

part # ■ 01154040 □ 01154041 ■ 01154042 3200K  
part # ■ 01154140 □ 01154141 ■ 01154142 5600K

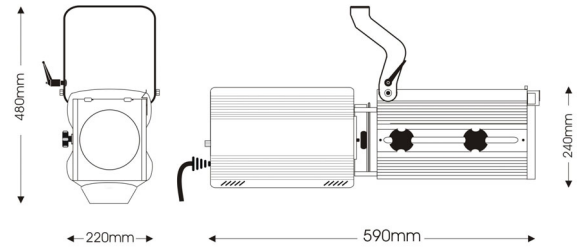

Stylish, compact and extremely high efficiency very wide angle LED zoom profile featuring a white 150W led COB power source and double-condenser optics. Recently introduced specifications include RDM control for 16 bit dimming, 3 choices on fan speed control and increased light output.

Its extremely accurate optics make it the obvious choice for medium-throws in theatrical sets, stages, TV studios, commercial and art displays, schools, worship venues, cruise ships or architectural applications where an extremely sharp beam shaping and gobo projection, coupled with user-friendly controls and an outstanding design are required.

Standard delivery includes 2m mains cable with fitted Power-con, 4 black shutter blades and a metal colour frame.

All models in the ARPA range are available in 3200K and 5600K white plus RGBW, in a choice of 3 finishes: black, white and silver, and 2 stirrups: manual and pole-operated.

A large choice of accessories complements the range.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)  
issue: ap ©2023. LDR reserves the right to alter the specification without prior notice.