

Application

Beam style	variable-spread, tight-edged beam
Suitable for	theatres, TV studios, architectural and commercial applications
Specification level	professional range
Beam angle	12°- 70°
Typical throw distance	4 – 20m

Electrical specifications

Light source	150W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.7A @ 230V AC 1.45 @ 110V AC
Power consumption	160W at full power
Cable/connection	1,6m mains cable with fitted Neutrik Power-con IN and OUT, supplied
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Construction	extruded aluminium and sheet steel
Mounting & suspension	steel stirrup 12mm centre hole + DIN mounting.
Handle	rear
Weight/Packed weight	10,1 kg / 12,3 kg
Colour frame	metal, 185 x 185mm, supplied

Operational specifications

Focus adjustment	screw focus with control at rear
Beam Shaping	using barndoor accessory
DMX channels / connection	1 to 3 ch / XLR5 connectors, IN/OUT
Colour	white, single source, no colour shift in fading
Dimming	from rear panel encoder or remote, 8 or 16 bits, via DMX
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available: Silent /Auto/Constant
Fade curve	2 curves (linear, square)
LED Frequency	16KHz - flicker-free
LCD display	set-up, DMX, monitor, diagnostic
RDM	integrated

Optical specifications

Optical system	150mm dia high-quality borosilicate PC lens + aluminum reflector
LED array	150W, white, round-shaped, replaceable
Rated LED life	50,000 hours at 25°C, maintains 70% of original intensity
Beam colour temperature	3200K
CRI (Colour Rendering Index)	>90

Accessories

Metal colour frame	■ 20100106	□ 20100106B	▣ 20100106C
4-leaf barndoor	■ 20100306	□ 20100306B	▣ 20100306C
Hook clamp	20100900	Safety bond	20101300

Photometric data


Spot	3200K – 128 lm/W (at 1440mA)									
Beam dia.	0.8	1.3	1.7	2.1	2.5	2.9	3.4	3.8	4.2	m
lux	9844	4375	2461	1575	1094	803	615	486	394	
Distance	4	6	8	10	12	14	16	18	20	m

Flood						
Beam dia.	5.6	8.4	11.2	14	16.8	m
lux	1542	686	385	247	171	
Distance	4	6	8	10	12	m

arpa pc150

150W, 100/260VAC, DMX512 + RDM
LED pebble convex luminaire

part # ■ 01152000 □ 01152001 ▣ 01152002 3200K

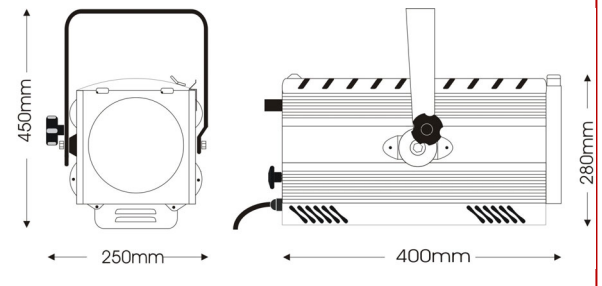


A high efficiency 150W led module featuring a PWM dimming power source harnessed in the high-specification optics of LDR pebble-convex spotlights. Recently introduced specifications include RDM control for 16 bit dimming, 3 choices on fan speed control and increased light output.

Arpa PC features a high-quality borosilicate pebble-lens and perfectly fits in theatrical sets, stages, TV studios, commercial and art displays, schools, worship venues, cruise ships or architectural applications where a pure white and evenly distributed tight-edged beam on medium throws is required.

Standard delivery includes 1.6m mains cable with fitted Power-con and a metal colour frame. All models in the ARPA range are available in 3200K and 5600K white plus RGBW, in a choice of 3 finishes: black, white and silver, and 2 stirrups: manual and pole-operated.

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
www.ldr.it info@ldr.it

issue: ap ©2023. LDR reserves the right to alter the specification without prior notice.