

## Application

Beam style	well-defined, flat field profile projection
Suitable for	small / medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 - 20m / 33 -66 ft

## Electrical specifications

Supply Volts	120V AC single phase
Max. Lamp Watts	1000W
Lamp base	G22
Auto-disconnect	double-pole microswitch
Cable/connection	2m / 6.6ft 3-core cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	epoxy powder paint, black or white
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm/2.68in diameter, glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm/0.48in centre hole and DIN mounting. Spigot for ø29mm/1.10in tube supplied
Handle	one, covering side and rear of followspot
Weight/Packed weight	19,4kg / 41lb net - 24,7kg / 53 lb packed
Packed volume	0.204m <sup>3</sup> ballast: 0.049m <sup>3</sup>
Filter cut size	185 x 185mm / 7.28x7.28in
Accessory runners	3 slots, accessory
Colour frame	metal, 185x185mm / 7.28x7.28in, not supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

## Operational specifications

Focus adjustment	slide zoom controls (dia./softness) at side
Lamp alignment	factory set
Beam Shaping	20 leaves iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

## Lamp types

1000W 32000K	EGT G22 1000W 120V 300 hrs
--------------	----------------------------

LDR recommends Philips lamps

## Accessories

Metal colour frame+ front runners	■20109106
5-colour colour changer	■20105106 □20105106B ■20105105 left-handed
Spare iris diaphragm	20100707
Gobo holder, A/B size	20100807 Gobo holder, B, dichro 20100807B
Black tripod	20102401 Chrome plated tripod 20102402
Spare spigot ø29mm	20102200
Spigot with fluid head	20102100
Kit 1-hand control iris/dowser	20107070
Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod

## Photometric data

Narrow focus		EGT G22 1000W				
Beam dia.	1,1	2,3	2,8	3,4		m
	44,7	89,5	111,8	134,2		in
<b>lux</b>	<b>7419</b>	<b>1855</b>	<b>1187</b>	<b>824</b>		
	20	40	50	60		ft
Distance	6,1	12	15,2	20,3		m

## Wide focus

Beam dia.	2,1	4,1	5,2	6,2		m
	5,57	5,90	6,56	6,88		ft
<b>lux</b>	<b>3709</b>	<b>927</b>	<b>593</b>	<b>412</b>		
	20	40	50	60		ft
Distance	6,1	12	15,2	20,3		m


# Canto<sup>®</sup> 1000 TH MK2

1000W, 120V, 50/60Hz  
TH followspot

part number : ■11857170 □11857171



CE

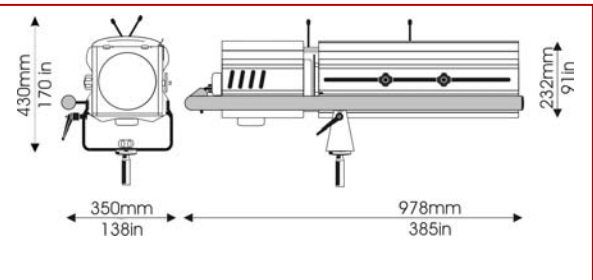

Compact, short to medium throw 1000W tungsten-halogen followspot. It features a large, user-friendly side handle, strong mechanics and excellent optics.

Standard delivery includes a 20-leaf iris diaphragm, mechanical dimmer, spigot and 2m mains cable. A large selection of accessories, including a 5-colour colour changer, tripods and a flight-case, is available for the Canto range

**Specials:** also available in kit, including followspot, fitted colour changer, black tripod and flight case



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) info@ldr.it

issue: ap ©2018. LDR reserves the right to alter the specification without prior notice