

Application

Beam style	well-defined, flat field profile projection
Suitable for	small, medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 20m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	epoxy powder paint, black or white
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø29mm tube supplied
Handle	rear and side
Weight/Packed weight	18kg / 22,4kg
Packed volume	0.204m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, accessory
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/ softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs
-------	--

LDR recommends Philips lamps

Accessories

Metal colour frame+ front runners	■20109106
5-colour colour changer	■20105106 □20105106B ■20105105 left-handed
Spare iris diaphragm	20100707
Gobo holder, A/B size	20100807 Gobo holder, B, dichro 20100807B
Black tripod	20102401 Chrome plated tripod 20102402
Spare spigot ø29mm	20102200
Spigot with fluid head	20102100
Kit 1-hand control iris/dowser	20107070
Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod

Photometric data

Narrow focus	CP90									
Beam dia.	1.7	1.8	2	2.1	2.2	2.4	2.5	2.7	2.8	m
lux	2118	1805	1556	1356	1191	1055	941	845	763	
Distance	12	13	14	15	16	17	18	19	20	m

Wide focus


Beam dia.	3.9	4.3	4.7	5.1	5.4	5.8	6.2	6.6	7	m
lux	1540	1273	1069	911	786	684	602	533	475	
Distance	10	11	12	13	14	15	16	17	18	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto[®] 1200th MK2

1200W, 230/240V TH
followspot

part number : ■10857170 □10857171

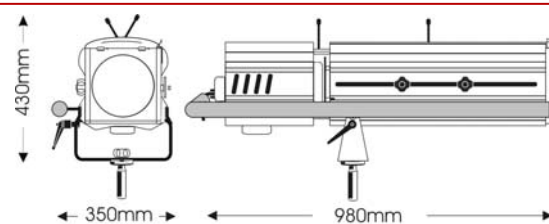

Compact, short to medium throw 1200W tungsten-halogen followspot. It features a large, user-friendly side handle, strong mechanics and excellent optics.

Standard delivery includes a colour frame, 20-leaf iris diaphragm, mechanical dimmer, spigot and 2m mains cable. A large selection of accessories, including a 5-colour colour changer, tripods and a flight-case, is available for the Canto range

Specials: also available in kit, including followspot, CP90 lamp, fitted colour changer, black tripod and flight case



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2018. LDR reserves the right to alter the specification without prior notice