

Application

Beam style	well-defined, flat field profile projection
Suitable for	medium / large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 35m

Electrical specifications

Supply Volts	230/240V AC single phase to ballast unit
Max. Lamp Watts	700W
Lamp base	G22
Auto-disconnect	double-pole microswitch
Cable/connection	2m, multicore cable to ballast, 2m 3x2.5mm2 bare ended cable to power
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/white epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Ballast	external unit (supplied) with on/off switch
Reflector	68mm diameter, glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø29mm tube supplied
Handle	rear and side
Weight/Packed weight	19,8kg / 24,7kg – ballast 16,5kg / 17,5kg
Packed volume	0.204m ³ ballast: 0.049m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, not supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

700W 6000K	Philips MSD 700 G22 3.000 hrs
700W 7200K	Philips MSR 700/2 G22 1.000 hrs

Accessories

Metal colour frame+ front runners	■20109106	
5-colour colour changer	■20105106 □20105106B	
5-colour colour changer left-handed	■20105105	
Spare iris diaphragm	20100707	
Gobo holder, B, dichro	20100807B Gobo holder, A/B size	20100807
Black tripod	20102401 Chrome plated tripod	20102402
Colour frame + runners	20109106 Spare spigot ø29mm	20102200
Kit 1-hand control iris/dowser	20107070 Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod	

Photometric data

Narrow focus		700 MSR									
Beam dia.		1.9	2.1	2.3	2.5	2.7	2.9	3.1	3.3	3.6	m
lux		3507	2841	2348	1973	1681	1449	1263	1110	983	
Distance		18	20	22	24	26	28	30	32	34	m


Wide focus											
Beam dia.		2.6	3.2	3.7	4.2	4.7	5.3	5.8	6.3	6.8	m
lux		2727	1894	1391	1065	842	682	563	473	403	
Distance		10	12	14	16	18	20	22	24	26	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto® 700msd/msr MK2

230V 50/60Hz
discharge followspot

part number : ■10707180 □10707181

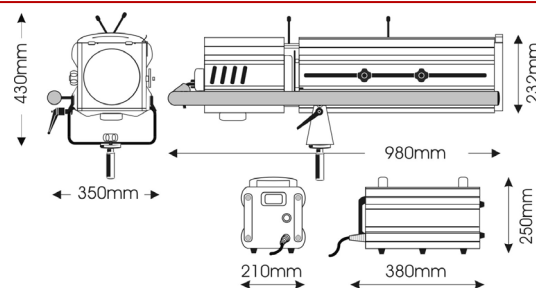

For more power at middle distance throws, this 700W MSR or MSD-powered discharge followspot is the obvious choice.

Canto® 700 features a large, user-friendly side handle, enhanced mechanics on the dowser and an excellent light output.

Standard delivery includes an external ballast, iris, mechanical dimmer, spigot, colour frame and 2m mains cable.

A large selection of accessories is available for the Canto range, including a flight case on braking wheels which accepts followspot, fitted colour changer, tripod, ballast unit and lamp



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2020. LDR reserves the right to alter present specifications without prior notice.