

# TONO F 2000 PLUS



10901000 230V black

11901000 120V black



## COMPATIBLE LAMPS

|             |      |       |           |       |         |
|-------------|------|-------|-----------|-------|---------|
| <b>CP55</b> | G22  | 2000W | 230V/240V | 3200K | 480 hrs |
| <b>CP75</b> | G22  | 2000W | 230V/240V | 3200K | 480 hrs |
| <b>CP92</b> | G22  | 2000W | 230V/240V | 3200K | 400 hrs |
| <b>CP72</b> | GY16 | 2000W | 230V/240V | 3200K | 480 hrs |
| <b>CP91</b> | G22  | 2500W | 230V/240V | 3200K | 400 hrs |
| <b>CYX</b>  | G38  | 2000W | 120V      | 3200K | 350 hrs |

LDR recommends Philips lamps

## PRODUCT SPECS

### lens type

200mm dia. Fresnel

### reflector

87,5mm dia. glass

### microswitch

double-pole

### colour frame

245x245mm

### throw

3-20 m

### beam angle

10°-70°

### lamp base


G22 (230V) - G38 (120V)

### weight

9,0 kg (230V) - 10,1 kg (120V)

## ACCESSORIES

|          |                               |
|----------|-------------------------------|
| 20100107 | colour frame, black           |
| 20100307 | 4-leaf barndoor, black        |
| 20101000 | hook clamp HD                 |
| 20101300 | safety bond                   |
| 20106026 | colour scroller Xpress 26     |
| 20600007 | plate 245x245mm for Xpress 26 |

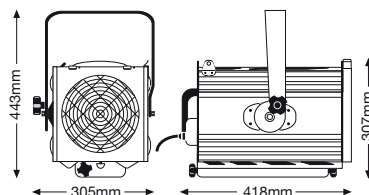

Compact, lightweight and powerful 2/2.5KW fresnel spotlight. It features an extremely wide beam angle and includes a height adjustable, robust G22 lamp-base, screw focus, strong tilt lock and double microswitch interlock for safe lamp replacement. A colour frame, safety guard and 1,5m mains cable are included as standard.

illuminatore fresnel da 2/2500W estremamente compatto, leggero e potente.

Dispone di robusto portalampada G22 regolabile in altezza, messa a fuoco di precisione con vite senza fine, bloccaggio forcella a frizione e doppio microinterruttore di sicurezza. Fornito di serie completo di telaio portagelatina, rete di protezione e 1,5m cavo di alimentazione.

## PHOTOMETRIC DATA CP75

|       | m Ø | 2,3   | 2,5   | 2,7   | 2,9   | 3,1 | 3,3  | 3,5  | 3,7  | 3,9  |
|-------|-----|-------|-------|-------|-------|-----|------|------|------|------|
| SPOT  | lux | 1.563 | 1.331 | 1.148 | 1.000 | 879 | 779  | 694  | 623  | 563  |
|       | m   | 12    | 13    | 14    | 15    | 16  | 17   | 18   | 19   | 20   |
| FLOOD | m Ø | 4,2   | 5,6   | 7,0   | 8,4   | 9,8 | 11,2 | 12,6 | 14,0 | 15,4 |
|       | lux | 2.200 | 1.238 | 792   | 550   | 404 | 309  | 244  | 198  | 164  |
|       | m   | 3     | 4     | 5     | 6     | 7   | 8    | 9    | 10   | 11   |

On request also available with GY16 lamp-base (230V only).

Su richiesta disponibile anche con porta-lampada GY16 (solo 230V).