

TONO PC 2000 PLUS



PC 10902000 230V black
11902000 120V black

PPC 10902100 230V black
11902100 120V black



COMPATIBLE LAMPS

CP55	G22	2000W	230V/240V	3200K	480 hrs
CP75	G22	2000W	230V/240V	3200K	480 hrs
CP92	G22	2000W	230V/240V	3200K	400 hrs
CP72	GY16	2000W	230V/240V	3200K	480 hrs
CP91	G22	2500W	230V/240V	3200K	400 hrs
CYX	G38	2000W	120V	3200K	350 hrs

LDR recommends Philips lamps

PRODUCT SPECS

lens type
200mm dia. pebble-convex

reflector
87,5mm dia. glass

microswitch
double-pole

colour frame
245x245mm

throw
3-20m

beam angle
9°-70°

lamp base
G22 (230V) - G38 (120V)


weight
10,3 kg (230V) - 11,4 kg (120V)

ACCESSORIES

- 20100107 colour frame, black
- 20100307 4-leaf barndoor, black
- 20101000 hook clamp HD
- 20101300 safety bond
- 20106026 colour scroller Xpress 26
- 20600007 plate 245x245mm for Xpress 26

Compact, lightweight and multifeatured 2/2.5KW pc spotlight for larger venues. It features an extremely wide beam angle and includes a front hinging lamp tray, a robust G22 lamp-base, screw focus, strong tilt lock and double-microswitch interlock for safe lamp replacement. A colour frame, safety guard and 1,5m mains cable are included as standard.

Illuminatore piano-convesso da 2/2500W per uso professionale in grandi ambienti. Dispone di sportello portalam-pada basculante, robusto anello di ancoraggio secondario, efficace sistema di bloccaggio forcella e doppio microinterruttore di sicurezza. Fornito di serie completo di telaio portagelatina, rete di protezione e 1,5m cavo di alimentazione.

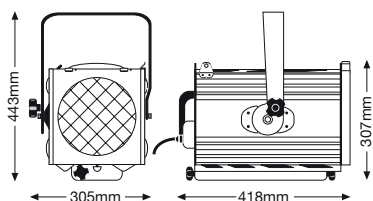

PHOTOMETRIC DATA CP75

SPOT	m Ø	1,9	2,0	2,2	2,4	2,5	2,7	2,8	3,0	3,1
	lux	2.625	2.237	1.929	1.680	1.477	1.308	1.167	1.047	945
	m	12	13	14	15	16	17	18	19	20
FLOOD	m Ø	4,2	5,6	7,0	8,4	9,8	11,2	12,6	14,0	15,4
	lux	2.700	1.519	972	675	496	380	300	243	201
	m	3	4	5	6	7	8	9	10	11

On request also available with GY16 lamp-base (230V only).

Su richiesta disponibile anche con porta-lampada GY16 (solo 230V).