

10853040 black

10853041 white


10853042 silver



### COMPATIBLE LAMPS

<b>CP67</b>	GX9.5	650W	230V/240V	3200K	120 hrs
<b>T21</b>	GX9.5	650W	230V/240V	3000K	900 hrs
<b>CP70</b>	GX9.5	1000W	230V/240V	3200K	240 hrs
<b>T19</b>	GX9.5	1000W	230V/240V	3050K	900 hrs
<b>CP90</b>	GX9.5	1200W	230V/240V	3200K	240 hrs
<b>T29</b>	GX9.5	1200W	230V/240V	3000K	480 hrs

LDR recommends Philips lamps

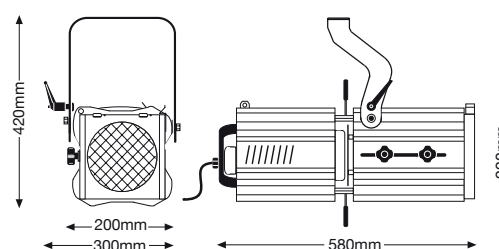

### ACCESSORIES

20100106	colour frame, black
20100706	iris diaphragm
20100806	gobo holder, A/B size
20100900	hook clamp
20101300	safety bond
20106019	colour scroller Xpress 19
20600006	plate 185x185mm for Xpress 19

### PRODUCT SPECS

**optical system**  
double condenser+zoom

**reflector**  
68mm dia. glass

**microswitch**  
double-pole

**colour frame**  
185x185mm

**throw**  
4-12m

**beam angle**  
30°-55°

**weight**  
11,9 kg

This extremely wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection. The comprehensive feature list includes 30° - 55° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute over-stage rigging angles and a double microswitch interlock for safe lamp replacement. A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 1000/1200W ad angolo estremamente largo e dall'elevato profilo tecnico-qualitativo. Dispone di ottica primaria a doppio condensatore per una precisa proiezione gobo, di gruppo centrale girevole, ottica secondaria a tre elementi, doppio microinterruttore e blocco forcella a leva. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.

### PHOTOMETRIC DATA CP90

	m Ø	2,1	2,7	3,2	3,8	4,3	4,8	5,4	5,9	6,4
NARROW	lux	5.594	3.580	2.486	1.827	1.398	1.105	895	740	622
	m	4	5	6	7	8	9	10	11	13
	m Ø	4,2	5,2	6,2	7,3	8,3	9,4	10,4	11,5	12,5
WIDE	lux	1.494	956	664	488	373	295	239	198	166
	m	4	5	6	7	8	9	10	11	13