

SUONO F 250 MSD

LDR
LUCI DELLA RIBALTA

10201080 black

10201081 white

10201082 silver



COMPATIBLE LAMPS

Philips MSD 250/2 GY9.5 8500K 3000 hrs

LDR recommends Philips lamps

PRODUCT SPECS

lens type

120mm dia. Fresnel

reflector

55mm dia. glass

microswitch

no

colour frame

150x150mm

throw

2-20 m

beam angle

7°-63°

voltage

208V / 230V / 240V

weight

8,6 kg

ACCESSORIES


20100103	colour frame, black
20100103B	colour frame, white
20100103C	colour frame, silver
20100303	4-leaf barndoor, black
20100303B	4-leaf barndoor, white
20100303C	4-leaf barndoor, silver
20100303D	4-leaf barndoor, white/black
20100303E	4-leaf barndoor, silver/black
20100900	hook clamp
20101300	safety bond

High power discharge Fresnel spotlight for display and internal architectural lighting applications. It produces a soft-edged beam with a variable beam angle ranging from 7° to 63°. A multi-frequency built-in ballast, colour frame and 1,5m mains cable are all supplied as standard. Available to special order in any colour from the RAL range.

Illuminatore fresnel per lampade a scarica 250MSD, ideale per utilizzi architeturali su aree espositive, in show room, vetrine, musei o centri commerciali.

Viene fornito di serie completo di ballast multi-frequenza incorporato, telaio porta-gelatina 150x150mm e 1,5m cavo di alimentazione.

A richiesta è disponibile in qualsiasi colore della gamma RAL.

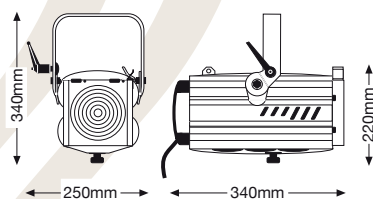

PHOTOMETRIC DATA MSD 250/2

SPOT	m Ø	0,2	0,4	0,5	0,6	0,7	0,9	1,0	1,1	1,2
	lux	23.150	10.289	5.788	3.704	2.572	1.890	1.447	1.143	926
	m	2	3	4	5	6	7	8	9	10
FLOOD	m Ø	2,5	3,7	4,9	6,1	7,4	8,6	9,7	11	12,3
	lux	3.300	1.467	825	528	367	269	206	163	132
	m	2	3	4	5	6	7	8	9	10