ARIA F 1000 PLUS

■ 10801000 *Black* □ 10801001 *White* ■ 10801002 *Silver*

ACCESSORIES

20100106
colour frame, black
20100106B
colour frame, white
20100106C
colour frame, silver
20100206
safety guard, black
20100206B
safety guard, white
20100206C
safety guard, silver
20100306
4-leaf barndoor, black
20100306B
4-leaf barndoor, white
20100306C
4-leaf barndoor, silver
20100306D
4-leaf barndoor, white/black
20100306E
4-leaf barndoor, silver/black
20100900
hook clamp
20101100
alu-grip clamp
20101200
safety bond
20106019
colour scroller Xpress 19

PRODUCT SPECS

lens type
150mm dia. Fresnel
reflector
100mm dia. aluminium
microswitch
no
colour frame
185x185mm
throw
2-15m
beam angle
10°-56°
weight
5,6kg

Quality, yet budget-priced, versatile 650W-1200W fresnel spotlight producing a variable-spread soft-edged beam. It is ideal for general stage lighting illumination in medium-sized venues and is supplied with a colour frame, safety guard and 1.5m mains cable.
A full range of accessories in different colours is available as optional extra.

Versatile illuminatore fresnel da 1000/1200W, di gamma economica e tuttavia di elevato standard qualitativo, che produce un fascio di luce regolabile e dai bordi soffusi. Particolarmente indicato per l'illuminazione generale di scena su distanze medio lunghe.
Viene fornito di serie completo di telaio portagelatina, rete di protezione e 1,5m cavo di alimentazione, mentre un'ampia gamma di accessori è disponibile come optional.

COMPATIBLE LAMPS

CP67 GX9.5 650W 230V/240V 3200°K 120hrs
T21 GX9.5 650W 230V/240V 3000°K 900hrs
CP70 GX9.5 1000W 230V/240V 3200°K 240hrs
T19 GX9.5 1000W 230V/240V 3050°K 900hrs
CP90 GX9.5 1200W 230V/240V 3200°K 240hrs
T29 GX9.5 1200W 230V/240V 3000°K 480hrs

• LDR recommends Philips lamps

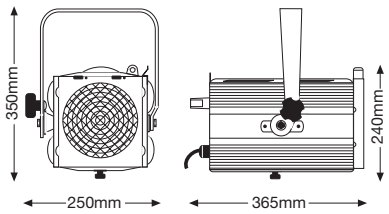

PHOTOMETRIC DATA CP90

SPOT	m ø	1,2	1,4	1,6	1,7	1,9	2,1	2,3	2,4	2,6
	lux	2.612	2.000	1.580	1.280	1.058	889	757	653	569
	m →	7	8	9	10	11	12	13	14	15
FLOOD	m ø	2,1	3,2	4,3	5,3	6,4	7,4	8,5	9,6	10,6
	lux	3.200	1.422	800	512	356	261	200	158	128
	m →	2	3	4	5	6	7	8	9	10