

istruzioni per l'uso
operating instructions
Bedienungsanleitung
instrucciones de
manejo
mode d'emploi
gebruiksaanwijzing

01201200


Alba F250 CM black

01202200

Alba PC250 CM black

100/260V, DMX512 + RDM

380W RGBW LED



ENGLISH – TABLE OF CONTENTS

1. Important safety norms	2
2. Box contents	3
3. Weight and dimensions	4
4. Important notice before the installation/ installation.....	4
5. Mechanical operation	5
6. Wiring	5
7. Voltage.....	5
8. Frequency	5
9. Connect to the power supply	5
10. Control functions and operation	6
11. Menu	6
11.1 DMX or manual mode.....	6
11.2 DMX address.....	6
11.3 Dimmer Resolution (8/16 bit)	7
11.4 Lost DMX signal.....	7
11.5 Strobe	7
11.6 Strobe Speed.....	7
11.7 Dimming Curve	8
11.8 Cut-off Dimming Response	8
11.9 Dimming Behaviour.....	8
11.10 Fan Setting	8
11.11 LCD Screen Illumination	9
11.12 Red Colour Intensity.....	9
11.13 Green Colour Intensity.....	9
11.14 Blue Colour Intensity.....	9
11.15 White Colour Intensity	9
11.16 Colour Temperature Selection (Tunable White) ...	10
11.17 Temperature Control	10
11.18 Software Version.....	10
11.19A Pro or Basic Control	10
11.20B Factory Settings	10
11.21C ID REMOTO	10
11.22D Calibration	11
11.23E Exit Hidden Menu.....	11
12. Software Upgrade – REMOTO Control Device.....	11
13. Cleaning and Maintenance	11
14. Spare Parts.....	11
15. Warranty.....	11
16. Summary of Controls and Functions	12
17. DMX Charts	13
17.1 DMX Chart 1.....	13
17.2 DMX Chart 2.....	14
17.3 DMX Chart 3.....	15
17.4 DMX Chart 4.....	16

LDR Conformity Certificate – Certificato di Conformità – Konformitätserklärung 17

Complaint form – Modulo di reclamo – Reklamationsformular 18

WEEE Directive – Direttiva RAEE – WEEE Richtlinie 19

ENGLISH

Thank you for choosing a quality product from Luci della Ribalta srl. We trust our products and services meet your requirements, but should this not be the case please contact us directly using the attached feedback form to help us improve the quality of our service.

This spotlight has been manufactured with great care and left our factory in perfect conditions, but if it has been damaged in transport please contact your dealer in the first instance. A feedback form is appended. Our warranty covers all manufacturing and component defects for 2 years from the date you purchased the product.

Our products are designed for the use of professional technicians, and the instructions provided here ensure safe and correct operation of this product. Luci della Ribalta srl will not accept any responsibility where damage has been caused to the product or persons through improper use of the product and/or non-compliance with the regulations described herein.

IMPORTANT: Read these user instructions before using the lighting unit

The instructions given here ensure a safe and correct usage of this product. A user's failure to comply with the installation, operating, maintenance and safety procedures mentioned in this manual, as well as those generally applicable to this lighting equipment, may cause the unit not to perform as expected. Luci della Ribalta accepts no liability for direct, indirect, incidental, special, or consequential damages resulting from the customer's failure to follow the installation, operating, maintenance and safety procedures in this manual or those generally applicable to lighting equipments.

The limitation extends to damages for personal injury, property damage, loss of operations, loss of profits, loss of product or loss of time, whether incurred in by the customer, the customer's employees or a third party.

Apart from the instructions given on this manual, all relevant safety and health standards of the appropriate EU Directives or the local safety and health standards of the country where the unit is installed, must be complied with.

1. IMPORTANT SAFETY NORMS

- This product is rated IP20 and is therefore designed for interior use only. For details on maximum ambient temperature, minimum distance from flammable objects and minimum distance from lit surface, please refer to the product label or the screen-printed information to be found on the rear plate and front side of each luminaire.
- Continuous mains power is required for this spotlight as an internal dimmer controls the intensity via DMX or local rotary knob. Use of a phase control dimmed mains supply may damage the internal electronics.
- This product features fan-assisted ventilation. Make sure you do not cover the fans or obstruct the air flow at any one time.
- Make sure the fans are working correctly. Should you detect even the slightest malfunction, switch the luminaire off and carry out the necessary servicing. Replace the fan if necessary. This product must be fitted with a front protection shield (wire guard or safety glass). Should this not be supplied as a standard accessory, please make sure you buy it separately and install it before using the product.
- There are no user serviceable parts in this product. Replacement of any internal component of this product must be carried out exclusively by professional personnel and only with original Luci della Ribalta srl components. Replacement of any part of the wiring system must comply with the original wiring diagram and with components identical or compatible with those originally fitted.

- This product must be fitted with a secondary fixing system such as a safety chain or bond. Should this not be supplied as a standard accessory, please make sure you buy it separately and install it before using the product.
- Installation of this product must be exclusively carried out by professional personnel in compliance with the safety norms in force in the country where the product is used.
- This product must be fitted with a secondary fixing system such as a safety chain or bond. Should this not be supplied as a standard accessory, please make sure you buy it separately and install it before using the product.



**WARNING: DANGER OF ELECTRICAL SHOCK
DO NOT OPERATE ON LIVE EQUIPMENT**

- Disconnect power before opening this fixture to access its light source or electronics.
- The replacement of the LED source or any of its electronic components can be carried out exclusively by professional personnel upon LDR's written authorization and only with original Luci della Ribalta srl components. Failure to obtain the manufacturer's authorization to carry out the replacement/repair, will immediately invalidate the product's warranty



WARNING: EYE DAMAGE HAZARD

Make sure this fixture is installed so as to avoid prolonged direct staring at its operating light source (LED) from a distance of less than 7m / 23ft.



WARNING: FIRE HAZARD

- Never locate this fixture on any flammable surface.
- Minimum distance of any part of the body of the luminaire from any flammable surface or object: 0,5m
- Minimum distance from lit surface, please refer to product label
- Make sure the mains power supply the fixture will be connected to is protected by a suitable thermal magnetic circuit breaker

2. BOX CONTENTS


Upon opening the packaging, please make sure it contains the following:

- Lighting unit in the chosen model
- Metal colour frame 185x185mm, fitted

- 160cm mains power cable with fitted Neutrik PowerCon blue connector

Should one or more items be missing, we kindly ask you to contact your dealer immediately.

3. WEIGHT AND DIMENSIONS

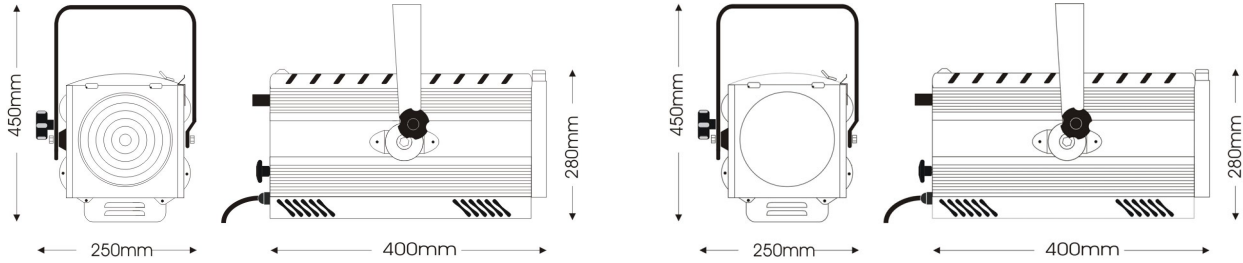

Alba F RGBW
 net weight: 9,7kg
 gross weight: 11,9 kg
 packing dim.: 60x40x45h cm

Alba PC RGBW
 net weight: 10,1 kg
 gross weight: 12,3 kg
 packing dim: 60x40x45h cm

4. IMPORTANT NOTICE BEFORE THE INSTALLATION/ INSTALLATION


Before installing this fixture check its weight on the product label and the weight of each accessory you are adding and make sure the structure you are installing it to withstand the total weight. The mounting stirrup rotates around the body of the luminaire and is designed to allow the spotlight to be suspended from above using a C-clamp or similar, or supported on a stand or bracket from below.

CAUTION

DO NOT TURN THE LUMINAIRE UPSIDE-DOWN BUT ALWAYS TURN THE STIRRUP IF YOU NEED TO MOUNT IT ON A STAND OR BRACKET

Note: the spotlight's location must provide suitable ventilation for the LED module.

- If not supplied choose a suitable clamp and make sure it is correctly fixed and strongly tightened to the stirrup according to the clamp's manufacturer's instructions
- If not supplied choose a suitable safety cable or bond. Clamp it to the eyelet provided on the upper rear part of the luminaire (see picture here below), run it twice around the stirrup and the structure the luminaire is hung to so as to bond them together and close the loop.



- When tilting the unit make sure the knob blocking the stirrup is strongly tightened and that the luminaire can hold the desired tilt angle

5. MECHANICAL OPERATION

Focus control: is located on the rear end of the product. Turn the knob clockwise to narrow the beam (SPOT). Turn the knob anticlockwise to widen the beam (FLOOD).

The beam distribution (peak/flat) is fixed.

Beam-shaping: a 4 leaf barndoor (A20100306) can be fitted on the front of the Alba to control and shape the beam


Tilt: the stirrup is fitted with a positive friction clamp controlled by a large knob. Turn the knob anticlockwise to release it, position the luminaire at the desired tilt angle and turn the knob clockwise to hold the desired position. Make sure the knob is strongly tightened at any time during operation

6. WIRING

Before being connected to the mains power, this unit may need to be wired with a suitable plug if not already installed. Make sure the plug you are using is rated for the proper power load and it conforms to the relevant EU/UL electrical standards.

- Make sure the plug you are fitting withstands the lamp power load.
- This fixture must be grounded
- To perform a correct wiring, please note that the cores in this mains lead are colour-coded as follows:

Ground: green+yellow – Neutral: blue – Phase: brown

- In case the colours of the wires do not correspond to the colour of the connection points on your plug, please proceed as follows:
- The green or green and yellow wire must be connected to the connection point marked with the letter E or with the symbol  or coloured in green or in green-yellow
- The blue wire must be connected to the connection point marked with the letter N or coloured in black
- The brown wire must be connected to the connection point marked with the letter L or coloured in red
- Before you finally position this product for use, temporarily connect it to a properly fused power supply to check the lamp works correctly

7. VOLTAGE

Before operating this unit please refer to the product label /screenprinting provided on the luminaire to check you are operating with the correct voltage.

The Alba F/PC RGBW **can be operated between 90V and 260V** and the electronic PSU inside the fixture will automatically switch to the available voltage.

8. FREQUENCY

Frequency on this product is automatically selected by the electronic PSU (50/60Hz)

9. CONNECT TO THE POWER SUPPLY

- Connect the unit to a continuous mains power source
- Make sure the power supply is protected by a suitable thermal magnetic circuit breaker
- This fixture must be grounded

10. CONTROL FUNCTIONS AND OPERATION

OPERATION: LCD display for DMX address, system setup and status details.

POWER: power LED status indicator, red colour. ON= power

DMX: DMX LED status indicator, green colour. LED OFF = DMX OFF and manual control activated, LED ON = DMX MODE activated with no DMX signal, FLASHING LED = receiving DMX

MENU: rotary switch selector to select and modify the operational modes. Turn left or right to navigate through the menu and press to select or to confirm

DMX IN: input DMX signal (pin1=0, pin2= DATA-, pin3=DATA+).

DMX OUT: Loop through DMX signal output

POWER IN: Mains power input

POWER OUT: Mains power output

11. MENU


There are eighteen different menus to control the settings of the ALBA RGBW LED. The rotary selector is used to adjust the settings and to navigate through the menu. Turn left or right to select the menu and push to access or to confirm the selected data or functions. To exit the selected menus without saving the data, press the rotary selector for at least 1 second.

11.1 DMX OR MANUAL (Mode)

Select the LED control mode between DMX (factory setting) and manual. To change the control mode press once the rotary selector until an arrow (←) appears on the menu. Turn the selector to the right or the left to select the desired mode of operation and press to confirm your selection.



Tap the rotary selector and the LCD screen will display the mode status and the current value:

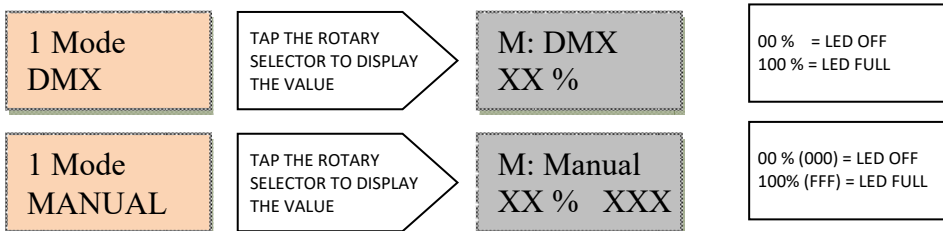

11.2 DMX ADDRESS (Addr)

It allows to select the initial DMX starting address to remotely control the LED functions. To change the initial DMX address press the rotary switch until an arrow appears, then turn to change to the desired DMX starting address. Press to confirm your selection. Factory setting is **001**.



11.3 DIMMER RESOLUTION (8/16b)


The dimming resolution can be controlled at 8 bits from one DMX channel to 16 bits with 2 DMX channels.

Factory setting is **8 Bits**.




11.4 LOST DMX SIGNAL (DMXMem)

In case of signal failure this function allows to store in memory the last DMX value. Factory setting is **ON**. Three options are available:

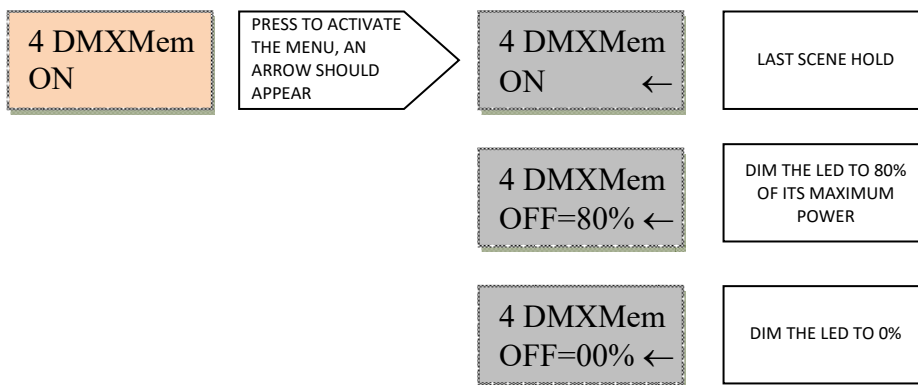


11.5 STROBE (Strobe)

This function enables the activation of the strobe function. Factory setting is **DISABLE**.




11.6 STROBE SPEED (SetStr)

It allows to set the strobe speed. This menu is not active when the strobe function is disabled or when it is remotely controlled through DMX. Factory setting is **OPEN**.

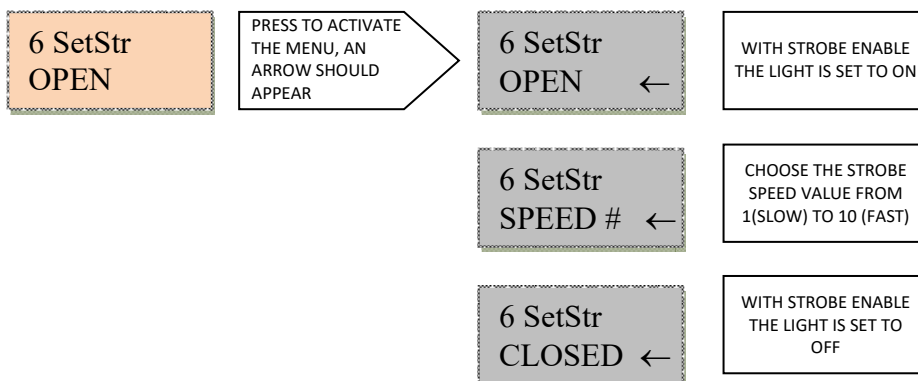


11.7 DIMMING CURVE (Curves)

This function allows to select a response curve for the Alba LED. A choice of two curves is available: Square and Linear. Factory setting is **SQUARE**.

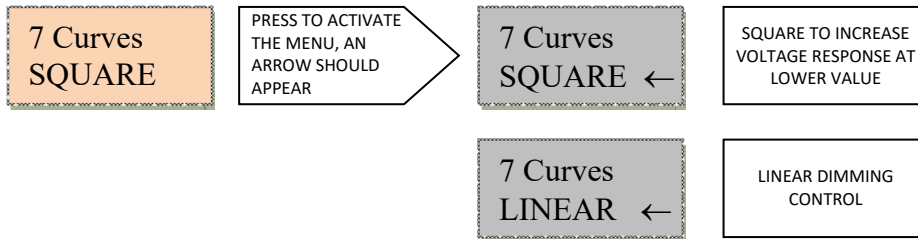


11.8 CUT OFF DIMMING RESPONSE (CutOff)

This function allows to select the LED behaviour simulating a tungsten or halogen lamp during the dimming cut off. Factory setting is **SLOW**.

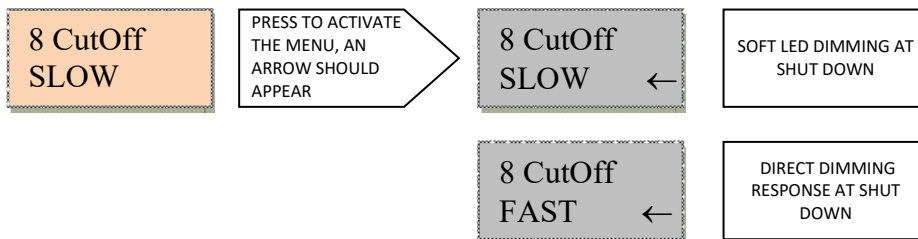

11.9 DIMMING BEHAVIOUR (Smooth)


This function allows to set the LED dimming response. Factory setting is **NORMAL**.

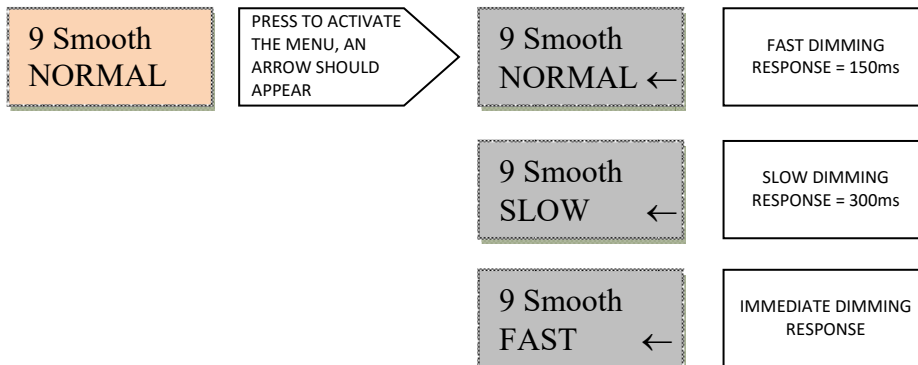

11.10 FAN SETTING (Fan)


This function allows to set the fan response. A choice of three modes is available: Automatic, Silent or Steady. When the fan is in Auto mode, its speed is controlled by the temperature of the LED. When Silent mode is chosen the fan runs slowly to reduce the noise. If Steady is activated the fan runs at constant speed, halfway between the minimum and maximum speed. In all cases, if the temperature on the LED exceeds the maximum admitted value, the LED is protected by a de-rating security system, which lowers the light output until the temperature goes back to safe levels, when full power is then restored automatically. Factory setting is **AUTO**.



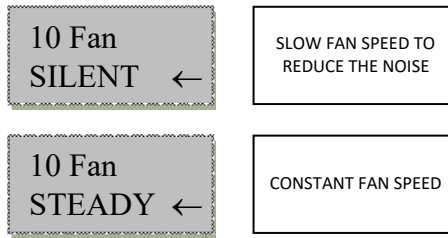


11.11 LCD SCREEN ILLUMINATION (BackL)

This function allows to turn off the LCD backlight, the LED POWER and LED DMX after 1'30" from last setting. Factory setting is **AutoOFF**.

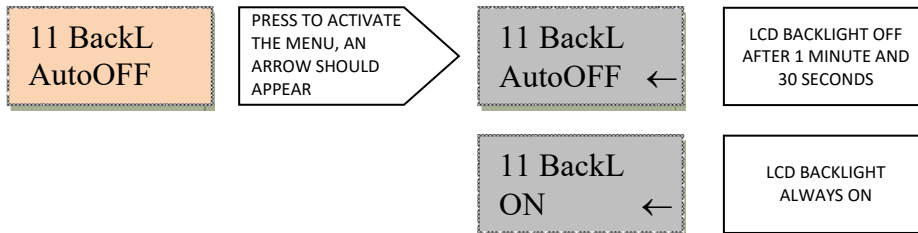


11.12 RED COLOUR INTENSITY (Red)

This function allows to set the intensity of the red colour for manual mode. Selecting the manual mode, 100% is automatically set.




11.13 GREEN COLOUR INTENSITY (Green)

This function allows to set the intensity of the green colour for manual mode. Selecting the manual mode, 100% is automatically set.




11.14 BLUE COLOUR INTENSITY (Blue)

This function allows to set the intensity of the blue colour for manual mode. Selecting the manual mode, 100% is automatically set.




11.15 WHITE COLOUR INTENSITY (White)

This function allows to set the intensity of white colour for manual mode. Selecting the manual mode, 100% is automatically set.




11.16 WHITE COLOUR TEMPERATURE SELECTION (Col.T)

This function allows to choose between 10 different white colour temperatures for manual mode. This function overwrites any setting made on the RGBW menus (see chapters 11.12, 11.13, 11.14 and 11.15 of this manual). Selecting the manual mode, 100% is automatically set. Please refer to DMX Chart 17.1 to see the available 10 shades of white.



11.17 TEMPERATURE CONTROL (Tled)

This function allows to visualize the LED temperature. Factory setting is °C.




11.18 SOFTWARE VERSION (SwVer)

This function allows to check the software version.

There are also four different hidden menus which allow to select the advanced settings of the ALBA LED. To activate this function turn the Alba OFF and ON again by pressing the rotary switch at power on.


11.19-A PRO or BASIC CONTROL (ProBasic)

The PRO-BASIC control is a special function which allows to limit the access to the control menu. Select ProBasic with the rotary switch and press to access the menu. Select: PRO, to enable access to all the functions
 BASIC, to limit the access to functions 11.1 Wi-Fi, DMX or MANUAL MODE, 11.2 DMX ADDRESS, 11.12 - 11.13 - 11.14 - 11.15 RGBW Colour intensity in manual mode, 11.16 White Colour Temperature selection in manual mode, 11.17 Temperature Control, 10.18 Software version.
 Factory setting is **PRO**.




11.20-B FACTORY SETTINGS (Reset)

The RESET control is a special function which allows to RESET the product to factory settings.




11.21-C ID REMOTO (ID Rem), software upgrade

It allows to select the ID number to connect Alba to the Remoto device, for the upload and download of firmware. To change the initial ID press the rotary switch until an arrow appears, then turn to change to the desired ID number. Press to confirm your selection. It is possible to select an ID number from 0 to 250. If ID number=0 remote control is not active. Factory setting is 000.



11.22-D CALIBRATION (Set Min)

It allows to calibrate the minimum output level of each colour.

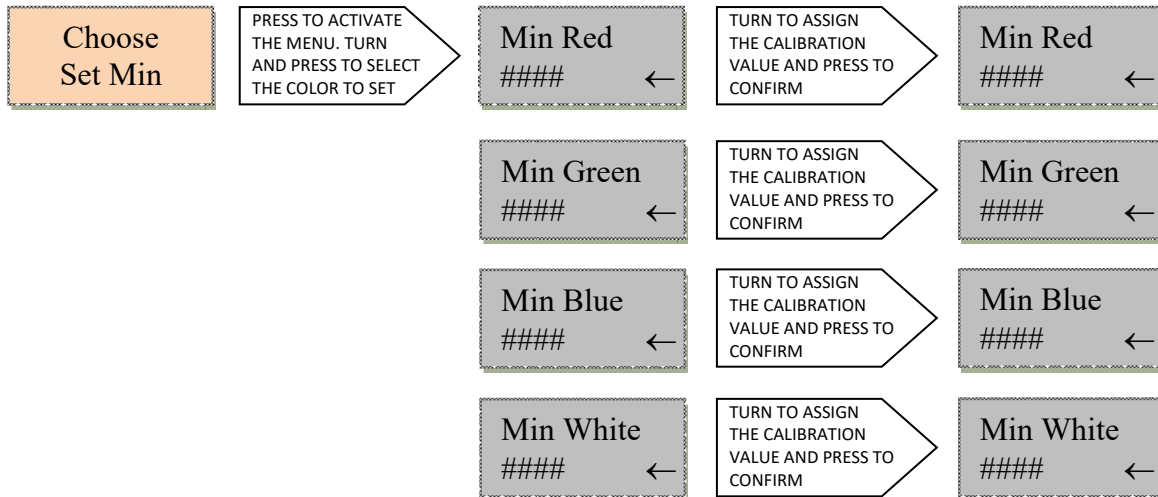

11.23-E EXIT HIDDEN MENU (Exit)

It allows to exit from hidden menus.

12. SOFTWARE UPGRADE – REMOTO control device

Software upgrades are available on demand. Please contact our office to get the latest available versions.

An accessory gateway

REMOTO, - GATEWAY FULL LINE DISPLAY REMOTER DMX512A- ARTNET (part # 20107072)

allows to upload the desired software version on your Albas. Please contact your local distributor for more detailed information.

13. CLEANING AND MAINTENANCE

To ensure maximum performance of the product, a regular maintenance service should be carried out. Please make sure the product is cold and disconnected from power supply when doing this.

- Clean all reflective parts such as lenses opening the product, if necessary.
- check and replace any visibly damaged component.
- clean air ducts and fans in order to allow proper ventilation activity on the product.
- check internal and external wiring and replace any cable which should be damaged by heat or mechanical agents.

14. SPARE PARTS

All components are available as spare parts. We strongly recommend you always use original LDR components as spare parts. Please refer to our technical assistance should you need to order and/or replace any part of the unit.

15. WARRANTY

Our warranty covers all structural and manufacturing defects for a period of one year from the date of purchase. In case of complaint, we strongly recommend that in the first instance you contact the local dealer who supplied the product to you. In all cases, please refer to the serial number located at the rear of the spotlight.

16. SUMMARY OF CONTROLS AND FUNCTIONS

#	Function	Description	Available Options	Factory Setting
1	Mode	MANUAL or DMX control	MANUAL (controlled from the rotary switch or slider); DMX	DMX
2	Addr	Selects the DMX starting address other remotely controlled functions are assigned in sequence to the 1st assigned DMX address	From 001 to 512	001
3	8/16b	8 or 16 Bits dimming resolution	8 BITS on 1 channel; 16 BITS on 2 channels	8 BITS
4	DMXMem	Sets the behaviour of the unit in case of DMX failure	ON = last DMX value; OFF=80% fade to 80% after 1,5 Sec; OFF=0%	ON
5	Strobe	Activates the Strobe function	ENABLE; DISABLE	DISABLE
6	SetStr	Selects the Strobe speed. This menu is inactive when the Strobe function is disabled or when is remotely controlled through DMX	OPEN = ON; SPEED = ## (select value from 01 slowest to 10 fastest); CLOSED = OFF	OPEN
7	Curves	Selects the dimming curve	SQUARE; LINEAR	SQUARE
8	CutOff	Replicates the halogen lamp dimming behaviour at cut off	FAST = NOT ACTIVE; SLOW = ACTIVE	SLOW
9	Smooth	Dimmer response	NORMAL = 150ms; SLOW = 300ms FAST = Immediate response	NORMAL
10	Fan	Fan setting	AUTO = regulated by Tled; SILENT = slow speed, low noise; SILENT = constant speed	AUTO
11	BackL	LCD screen retro-illumination	ON; AutoOFF = LCD light off after 1'30"	AutoOff
12	Red	Red intensity for manual mode	From 00% to 100%	---
13	Green	Green intensity for manual mode	From 00% to 100%	---
14	Blue	Blue intensity for manual mode	From 00% to 100%	---
15	White	White intensity for manual mode	From 00% to 100%	---
16	Col.T	White colour temperature for manual mode	####°K = 10 available colour temperature preset	---
17	Tled	Visualizes the LED temperature	Select the LED Temp in °C or F°	°C
18	SwVer	Visualizes the software version		---

SPECIAL FUNCTIONS : to activate these functions press the rotary switch at power on				
#	Function	Description	Available Options	Factory Setting
A	ProBasic	Sets the available from the control menu	PRO = Enables access to all functions; BASIC = Limit the access to: 1 Mode, 2 Addr, 12 Tled and 13 SwVer	PRO
B	RESET	Factory RESET	Return to factory settings	---
C	ID Rem	Sets the ID number to activate the Remoto control for upload and download firmware	From 000 (no remote control) to 250	000
D	Set Min	Sets the minimum output level of each colour	Red: from 000 to 9999	---
			Green: from 000 to 9999	---
			Blue: from 000 to 9999	---
			White: from 000 to 9999	---
E	Exit	Exits from hidden menus		---

17. DMX CHARTS

17.1 DMX chart 1 (16 bit dimmer and strobe disabled)

This DMX chart refers to the luminaire set with default parameters.

DMX Channel	Function	Type of Control	Effect	Decimal		Percentage	
				Start	End	Start	End
1	Master Dimmer	Proportional	Adjusts luminous output intensity from 0 to 100%	0	255	0%	100%
2	Spare Channel	Step	No effect	0	255	0%	100%
3	Red	Proportional	Proportional setting of the red colour from 0 to 100%	0	255	0%	100%
4	Green	Proportional	Proportional setting of the green colour from 0 to 100%	0	255	0%	100%
5	Blue	Proportional	Proportional setting of the blue colour from 0 to 100%	0	255	0%	100%
6	White	Proportional	Proportional setting of the white colour from 0 to 100%	0	255	0%	100%
7	Tunable White	Step	No effect	0	5	0%	1%
		Step	White 2700°K	6	30	2%	11%
		Step	White 3000°K	31	55	12%	21%
		Step	White 3200°K	56	80	22%	31%
		Step	White 3800°K	81	105	32%	41%
		Step	White 4000°K	106	130	42%	51%
		Step	White 4200°K	131	155	52%	61%
		Step	White 4600°K	156	180	62%	70%
		Step	White 5200°K	181	205	71%	80%
		Step	White 5600°K	206	230	81%	90%
		Step	White 5800°K	231	255	91%	100%
Luminaire: Alba RGBW			Chart name: DMX512 Functions chart 1 (Default)	Revision: 2.0		Date: February 2021	

17.2 DMX chart 2 (16 bit dimmer enabled, strobe disabled)

This DMX chart refers to the luminaire set with 16 bits resolution (See chapter 11.3 of this manual).

DMX Channel	Function	Type of Control	Effect	Decimal		Percentage	
1	Master Dimmer	Proportional	Adjusts luminous output intensity from 0 to 100%	0	- 255	0%	- 100%
2	Dimmer Fine	Proportional	Fine dimmer control 16 bit	0	- 255	0%	- 100%
3	Red	Proportional	Proportional setting of the red colour from 0 to 100%	0	- 255	0%	- 100%
4	Green	Proportional	Proportional setting of the green colour from 0 to 100%	0	- 255	0%	- 100%
5	Blue	Proportional	Proportional setting of the blue colour from 0 to 100%	0	- 255	0%	- 100%
6	White	Proportional	Proportional setting of the white colour from 0 to 100%	0	- 255	0%	- 100%
7	Tunable White	Step	No effect	0	- 5	0%	- 1%
		Step	White 2700°K	6	- 30	2%	- 11%
		Step	White 3000°K	31	- 55	12%	- 21%
		Step	White 3200°K	56	- 80	22%	- 31%
		Step	White 3800°K	81	- 105	32%	- 41%
		Step	White 4000°K	106	- 130	42%	- 51%
		Step	White 4200°K	131	- 155	52%	- 61%
		Step	White 4600°K	156	- 180	62%	- 70%
		Step	White 5200°K	181	- 205	71%	- 80%
		Step	White 5600°K	206	- 230	81%	- 90%
		Step	White 5800°K	231	- 255	91%	- 100%
Luminaire: Alba RGBW			Chart name: DMX512 Functions chart 2 (16bits)	Revision: 2.0		Date: February 2021	

17.3 DMX chart 3 (Strobe function enabled, 8 bit dimmer)

This DMX chart refers to the luminaire set with strobe function on (See chapter 11.5 of this manual).

DMX Channel	Function	Type of Control	Effect	Decimal		Percentage	
1	Master Dimmer	Proportional	Adjusts luminous output intensity from 0 to 100%	0	- 255	0%	- 100%
2	Spare Channel	Step	No effect	0	- 255	0%	- 100%
3	Red	Proportional	Proportional setting of the red colour from 0 to 100%	0	- 255	0%	- 100%
4	Green	Proportional	Proportional setting of the green colour from 0 to 100%	0	- 255	0%	- 100%
5	Blue	Proportional	Proportional setting of the blue colour from 0 to 100%	0	- 255	0%	- 100%
6	White	Proportional	Proportional setting of the white colour from 0 to 100%	0	- 255	0%	- 100%
7	Tunable White	Step	No effect	0	- 5	0%	- 1%
		Step	White 2700°K	6	- 30	2%	- 11%
		Step	White 3000°K	31	- 55	12%	- 21%
		Step	White 3200°K	56	- 80	22%	- 31%
		Step	White 3800°K	81	- 105	32%	- 41%
		Step	White 4000°K	106	- 130	42%	- 51%
		Step	White 4200°K	131	- 155	52%	- 61%
		Step	White 4600°K	156	- 180	62%	- 70%
		Step	White 5200°K	181	- 205	71%	- 80%
		Step	White 5600°K	206	- 230	81%	- 90%
8	Strobe	Step	Open	0	- 20	0%	- 8%
		Step	Strobe speed 1 (minimum frequency)	21	- 40	9%	- 15%
		Step	Strobe speed 2	41	- 60	16%	- 24%
		Step	Strobe speed 3	61	- 80	25%	- 31%
		Step	Strobe speed 4	81	- 100	32%	- 39%
		Step	Strobe speed 5	101	- 120	40%	- 47%
		Step	Strobe speed 6	121	- 140	48%	- 55%
		Step	Strobe speed 7	141	- 160	56%	- 63%
		Step	Strobe speed 8	161	- 180	64%	- 71%
		Step	Strobe speed 9	181	- 200	72%	- 78%
		Step	Strobe speed 10 (maximum frequency)	201	- 220	79%	- 86%
		Step	Closed	221	- 255	87%	- 100%
Luminaire: Alba RGBW			Chart name: DMX512 Functions chart 3 (Strobe)	Revision: 2.0		Date: February 2021	

17.4 DMX chart 4 (16 bits dimmer and Strobe enabled)

This DMX chart refers to the projector set with 16 bits resolution and strobe function active (See chapter 11.3 and 11.5 of this user guide).

DMX Channel	Function	Type of Control	Effect	Decimal		Percentage	
1	Master Dimmer	Proportional	Adjusts luminous output intensity from 0 to 100%	0	- 255	0%	- 100%
2	Dimmer Fine	Proportional	Fine dimmer control 16 bit	0	- 255	0%	- 100%
3	Red	Proportional	Proportional setting of the red colour from 0 to 100%	0	- 255	0%	- 100%
4	Green	Proportional	Proportional setting of the green colour from 0 to 100%	0	- 255	0%	- 100%
5	Blue	Proportional	Proportional setting of the blue colour from 0 to 100%	0	- 255	0%	- 100%
6	White	Proportional	Proportional setting of the white colour from 0 to 100%	0	- 255	0%	- 100%
7	Tunable White	Step	No effect	0	- 5	0%	- 1%
		Step	White 2700°K	6	- 30	2%	- 11%
		Step	White 3000°K	31	- 55	12%	- 21%
		Step	White 3200°K	56	- 80	22%	- 31%
		Step	White 3800°K	81	- 105	32%	- 41%
		Step	White 4000°K	106	- 130	42%	- 51%
		Step	White 4200°K	131	- 155	52%	- 61%
		Step	White 4600°K	156	- 180	62%	- 70%
		Step	White 5200°K	181	- 205	71%	- 80%
		Step	White 5600°K	206	- 230	81%	- 90%
		Step	White 5800°K	231	- 255	91%	- 100%
8	Strobe	Step	Open	0	- 20	0%	- 8%
		Step	Strobe speed 1 (minimum frequency)	21	- 40	9%	- 15%
		Step	Strobe speed 2	41	- 60	16%	- 24%
		Step	Strobe speed 3	61	- 80	25%	- 31%
		Step	Strobe speed 4	81	- 100	32%	- 39%
		Step	Strobe speed 5	101	- 120	40%	- 47%
		Step	Strobe speed 6	121	- 140	48%	- 55%
		Step	Strobe speed 7	141	- 160	56%	- 63%
		Step	Strobe speed 8	161	- 180	64%	- 71%
		Step	Strobe speed 9	181	- 200	72%	- 78%
		Step	Strobe speed 10 (maximum frequency)	201	- 220	79%	- 86%
		Step	Closed	221	- 255	87%	- 100%
Luminaire: Alba RGBW			Chart name: DMX512 Functions chart 4 (16 bits + Strobe)	Revision: 2.0		Date: February 2021	

Luci della Ribalta srl reserves the right to modify the present document without prior notice.



CERTIFICATO DI CONFORMITA' - CERTIFICATE OF CONFORMITY
KONFORMITAETSERKLAREUNG - CERTIFICAT DE CONFORMITE'
CERTIFICADO DE CONFORMIDAD

I Noi sottoscritti dichiariamo, sotto la nostra completa responsabilità, che i prodotti:
EN We hereby declare, under our own responsibility, that the products listed here below:
D Wir beglaubigen, daß die nachfolgend genannten Produkte:
F Nous certifions, sous notre responsabilité, que le produits mentionnés ci-dessous:
ES Los que subscriben declaran, bajo su responsabilidad, que los productos aquí listados:

ALBA 8/22, ALBA 18/36, ALBA 30/55, ALBA F, ALBA PC LED LUMINAIRES
Standard models and all their variants

I sono conformi alle seguenti normative:
EN conform to to the following standards:
D entsprechen den nachfolgen angeführten Normen:
F sont conformes aux normes ci-après:
ES cumplen de hecho con las siguientes normas:

EN IEC 55015:2019	LIMITS AND METHODS OF MEASUREMENTS OF RADIO DISTURBANCE CHARACTERISTICS OF ELECTRICAL LIGHTING AND SIMILAR EQUIPMENT
EN 61547: 2020	EQUIPMENT FOR GENERAL LIGHTING PURPOSES. EMC IMMUNITY REQUIREMENTS
EN 61000-3-2: 2019	ELECTROMAGNETIC COMPATIBILITY (EMC). PARTS 3-2: LIMITS -LIMITS FOR HARMONIC CURRENT EMISSIONS (EQUIPMENT INPUT CURRENT UP TO AND INCLUDING 16 A PER PHASE) CLASS C
EN 61000-3-3: 2013+A1: 2019	ELECTROMAGNETIC COMPATIBILITY (EMC) - PART 3-3: LIMITS - LIMITATION OF VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER IN PUBLIC LOW-VOLTAGE SUPPLY SYSTEMS, FOR EQUIPMENT WITH RATED CURRENT \leq 16 A PER PHASE AND NOT SUBJECT TO CONDITIONAL CONNECTION
EN IEC 60598-1: 2021+A11: 2022	SPECIFIES GENERAL REQUIREMENTS FOR LUMINAIRES. INCORPORATING ELECTRIC LIGHT SOURCES FOR OPERATIONS FROM SUPPLY VOLTAGES UP TO 1 000 V.
EN IEC 60598-2-17: 2018	SPECIFIES REQUIREMENTS FOR STAGES, TELEVISION, FILM AND PHOTOGRAPHIC STUDIO LUMINAIRES (INCLUDING SPOT AND FLOODLIGHTING PROJECTORS) FOR USE OUTDOORS AND INDOORS, WITH ELECTRIC LIGHT SOURCES ON SUPPLY VOLTAGES NOT EXCEEDING 1 000 V.
EN 62493: 2015	APPLIES TO THE ASSESSMENT OF LIGHTING EQUIPMENT RELATED TO HUMAN EXPOSURE TO ELECTROMAGNETIC FIELD
EN 63000: 2018	TECHNICAL DOCUMENTATION FOR ASSESSMENT OF ELECTRICAL AND ELECTRONIC PRODUCTS WITH RESPECT TO THE RESTRICTION OF HAZARDOUS SUBSTANCES

FOLLOWING THE EU DIRECTIVE OF THE EUROPEAN PARLAMENT AND THE COUNCIL OF THE EUROPEAN UNION:


- 2014/30/EU ELECTROMAGNETIC COMPATIBILITY (EMC)
- 2014/35/EU LOW VOLTAGE (LVD)
- 2011/65/UE
- 2009/125/CE
- 2019/2020 + 2021/341

In faith, Lisa Papi, President

Luci della Ribalta srl

Via berna 14, 46042 castel goffredo mn italy
tel +39 0376 771777 fax +39 0376 772140 email info@ldr.it
web www.ldr.it Riva 01815640204 c.iso IT01815640204

Lisa Papi

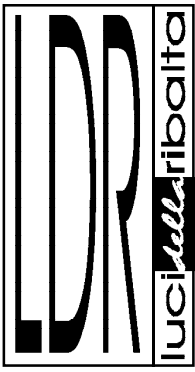

modulo di reclamo - complaint form
Reklamationsformular - formulaire de réclamation -
hoja de reclamaciones

email: info@ldr.it

Azienda ed Indirizzo - Company's name and address - Firmenname und Adresse - Nom et adresse -
Nombre y dirección

Nome del rivenditore da cui il prodotto è stato acquistato - Name of the dealer where you have purchased
the product - Namen der Firma, die Ihnen das Produkt verkauft hat - Nom de la société qui vous a vendu ce
produit - Nombre de la compañía donde han comprado el producto:

- | | | | |
|---------------------|--------------------------|----------|------------------------|
| Prodotto difettoso | <input type="checkbox"/> | 01201200 | Alba F250 CM black |
| Faulty product | <input type="checkbox"/> | 01202200 | Alba PC250 CM black |
| Defekte s Produkt | <input type="checkbox"/> | | 100/260V, DMX512 + RDM |
| Produit défectueux | <input type="checkbox"/> | | 380W RGBW LED |
| Producto defectuoso | <input type="checkbox"/> | | |
| | <input type="checkbox"/> | | |
| | <input type="checkbox"/> | | |


Descrizione del problema /Problem found/Beschreibung des Defekts/Description du défaut/Descripción del problema

Data d'acquisto - Date of purchase - Kaufdatum - Date de l'achat - Fecha de compra _____

Si prega di allegare prova d'acquisto - Please attach copy of purchase invoice - Bitte Kaufnachweis beilegen -
Veuillez joindre une quittance d'achat - Les rogamos incluyan l copia de la factura de compra.

Nome e qualifica - Name and position - Name und Funktion - Nom et fonction - Nombre y cargo

Data - Date - Datum - Date - Fecha _____



IT

Direttiva 2002/96/CE (Rifiuti di Apparecchiature Elettriche ed Elettroniche - RAEE):
informazioni agli utenti: ai sensi dell'art. 13 del Decreto Legislativo 25 luglio 2005, n. 151 "Attuazione delle Direttive 2002/95/CE, 2002/96/CE e 2003/108/CE, relative alla riduzione dell'uso di sostanze pericolose nelle apparecchiature elettriche ed elettroniche, nonché allo smaltimento dei rifiuti" questo prodotto è conforme.

Il simbolo del cassonetto barrato riportato sull'apparecchiatura o sulla sua confezione indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'Apparecchiatura giunta a fine vita agli idonei centri di raccolta differenziata dei Rifiuti Elettronici ed Elettrotecnici, oppure riconsegnarla al rivenditore al momento dell'acquisto di una nuova apparecchiatura di tipo equivalente, in ragione di uno a uno. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento ed allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce il reimpiego e/o riciclo dei materiali di cui è composta l'apparecchiatura. Lo smaltimento abusivo del prodotto da parte dell'utente comporta l'applicazione delle sanzioni amministrative previste dalla normativa vigente.

ES

Directiva 2002/96/EC (Residuos de aparatos eléctricos y electrónicos - RAEE):
Información para el usuario.

Este producto es conforme con la Directiva EU 2002/96/CE. El símbolo de la papelera barrada situado sobre el aparato indica que este producto, al final de su vida útil, debe ser tratado separadamente de los residuos domésticos. El usuario es responsable de la entrega del aparato al final de su vida útil a los centros de recogida autorizados. El adecuado proceso de recogida diferenciada permite dirigir el aparato desechado al reciclaje, a su tratamiento y a su desmantelamiento de una forma compatible con el medio ambiente, contribuyendo a evitar los posibles efectos negativos sobre el ambiente y la salud, favoreciendo el reciclaje de los materiales de los que está compuesto el producto. Para información más detallada inherente a los sistemas de recogida disponibles, dirigirse al servicio local de recogida o al establecimiento donde se adquirió el producto.

FR

Directive 2002/96/CE (Déchets d'équipements électriques et électroniques - DEEE):
informations aux utilisateurs.

Ce produit est conforme à la Directive ED 2002/96/CE. Le symbole de la corbeille barrée reporté sur l'appareil indique que ce dernier doit être éliminé à part lorsqu'il n'est plus utilisable et non pas avec les ordures ménagères. L'utilisateur a la responsabilité de porter l'appareil hors d'usage à un centre de ramassage spécialisé. Le tri approprié des déchets permet d'acheminer l'appareil vers le recyclage, le traitement et l'élimination de façon écologiquement compatible. Il contribue à éviter les effets négatifs possibles sur l'environnement et sur la santé, tout en favorisant le recyclage des matériaux dont est constitué le produit. Pour avoir des informations plus détaillées sur les systèmes de ramassage disponibles, s'adresser au service local d'élimination des déchets ou au revendeur.

DE

Richtlinie 2002/96/EU (Elektro- und Elektronik-Altgeräte - WEEE):
Benutzerinformationen.

Dieses Produkt entspricht der EU Richtlinie 2002/96/EU. Das Symbol des auf dem Gerät dargestellten, durchgestrichenen Korbes gibt an, dass das Produkt am Ende seiner Nutzungsdauer gesondert vom Hausmüll zu behandeln ist. Am Ende der Nutzungsdauer ist der Benutzer für die Überantwortung des Geräts an geeignete Sammelstellen verantwortlich. Die angemessene, getrennte Müllsammmlung zwecks umweltkompatibler Behandlung und Entsorgung für den anschließenden Recycling beginn des nicht mehr verwendeten Geräts trägt zur Vermeidung möglicher schädlicher Wirkungen auf Umwelt und Gesundheit bei und begünstigt das Recycling der Materialien, aus denen das Produkt zusammengesetzt ist. Für nähere Informationen bezüglich der zur Verfügung stehenden Sammelsysteme, wenden Sie sich bitte an den örtlichen Müllentsorgungsdienst oder an das Geschäft, in dem der Kauf getätigt worden ist.

UK

Directive 2002/96/EC (Waste Electrical and Electronic Equipment - WEEE):
information for users.

This product complies with EU Directive 2002/96/EC. The crossed-out wastebasket symbol on the appliance means that at the end of its useful lifespan, the product must be disposed of separately from ordinary household wastes. The user is responsible for delivering the appliance to an appropriate collection facility at the end of its useful lifespan. Appropriate separate collection to permit recycling, treatment and environmentally compatible disposal helps prevent negative impact on the environment and human health and promotes recycling of the materials making up the product. For more information on available collection facilities, contact your local waste collection service or the shop where you bought this appliance.

NL

Richtlijn 2002/96/EG (Afgedankte Elektrische en Elektronische Apparaten - AEEA):
informatie voor de gebruikers.

Dit product voldoet aan de richtlijn EU 2002/96/EG. Het symbool van de vuilnisbak met een streep erdoor, dat op het apparaat staat, geeft aan dat het product, wanneer het wordt afgedankt, niet met het huisvuil kan worden meegegeven. Het is de verantwoordelijkheid van de gebruiker het product, op het moment dat dit wordt afgedankt, in te leveren bij een centrum voor gescheiden afvalverwerking. Een correcte gescheiden afvalverwerking, die gericht is op de recycling van het afgedankte product en die een milieuvriendelijke behandeling en vernietiging mogelijk maakt, draagt ertoe bij mogelijk negatieve effecten op het milieu en op de gezondheid te voorkomen en bevordert het hergebruik van de materialen waaruit het product bestaat. Voor meer gedetailleerde informatie met betrekking tot de voorhanden zijnde afvalverwerkingsystemen dient u zich te wenden tot de plaatselijke vuilnisdienst of tot de winkelier waar u het product heeft gekocht.

PT

Directiva 2002/96/CE (Resíduos de equipamentos eléctricos e electrónicos REEE):
informações para os utilizadores.

Este produto é conforme à Directiva EU 2002/96/CE. O símbolo do cesto barrado marcado no aparelho indica que o produto, no fim da própria vida útil, deve ser tratado separadamente do lixo doméstico. O utilizador é responsável pela entrega do aparelho, no fim da vida do mesmo, às apropriadas estruturas de recolha. A adequada recolha diferenciada para o encaminhamento sucessivo do aparelho à reciclagem, ao tratamento e ao escoamento ambientalmente compatível, contribui para evitar possíveis efeitos negativos sobre o ambiente e a saúde e favorece a reciclagem dos materiais que compõem o produto. Para informações mais detalhadas inerentes aos sistemas de recolha disponíveis, dirija-se ao serviço

local de escoamento de resíduos, ou a loja na qual efectuou a compra.

NO

WEEE-symbolet (Waste Electrical and Electronic Equipment).

Bruken av WEEE-symbolet indikerer at dette produktet ikke kan behandles som husholdningsavfall. Du vil bidra til å beskytte miljøet ved å sørge for at dette produktet blir avhendet på en forsvarlig måte. Ta kontakt med kommunale myndigheter, renovasjonsselskapet der du bor eller forretningen hvor du kjøpte produktet for å få mer informasjon om resirkulering av dette produktet.

S

Symbol för avfall från elektrisk och elektronisk utrustning (WEEE).

Märkning med WEEE-symbolen visar att produkten inte får behandlas som hushållsavfall. Genom att slänga den här produkten på rätt sätt bidrar du till att skydda miljön. Mer information om återvinning av produkten kan du få av de lokala myndigheterna, din renhållningsservice eller i affären där du köpte produkten.

FI

WEEE-merkintä (sähkö- ja elektroniikkalaiteromu).

WEEE-merkintä osoittaa, että tätä tuotetta ei voi käsitellä kotitalousjätteen tavoin. Kun huolehdit tämän tuotteen asianmukaisesta hävittämisestä, autat suojelemaan ympäristöä. Lisätietoja tämän tuotteen kierrättämisestä saat paikallisviranomaisilta, jätehuoltoyhtiöltäsi tai myymälästä josta ostit tämän tuotteen.

DK

Symbol for affald af elektrisk og elektronisk udstyr (WEEE)

Brugen af WEEE-symbolet betyder, at dette produkt ikke må behandles som husholdningsaffald. Ved at sørge for korrekt bortskaffelse af produktet medvirker du til at beskytte miljøet. Du kan få flere oplysninger om genbrug af dette produkt hos de lokale myndigheder, dit renovationselskab eller i forretningen, hvor du har købt produktet.

HU

Hulladék elektromos vagy elektronikus készüléket jelölő szimbólum.

Ez a szimbólum azt jelöli, hogy a terméket nem szabad háztartási hulladékként kezelni. A hulladékká vált termék megfelelő elhelyezésével hozzájárul a környezet védelméhez. A termék újrafelhasználásával kapcsolatban a helyi szerveknél háztartási hulladékokat elszállító vállalatnál vagy a terméket értékesítő üzletben tájékozódhat.

CZ

Symbol pro odpadní elektrický a elektronický materiál (WEEE).

Použití symbolu WEEE označuje, že tento produkt ne lze likvidovat jako domovní odpad. Správnou likvidací tohoto produktu přispějete k ochraně životního prostředí. Podrobnější informace o likvidaci tohoto produktu vám poskytne místní úřady, společnost pro likvidaci komunálního odpadu nebo obchod, kde jste zboží zakoupili.

