

## Application

Beam style	well-defined, flat field profile projection
Suitable for	medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	5 - 25m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	14.3kg / 16.8kg
Packed volume	0.17m <sup>3</sup>
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

## Operational specifications

Focus adjustment	slide zoom controls (dia. and softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

## Lamp types

650W	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs

## LDR recommends Philips lamps

## Accessories

Lamps	see above
Spare metal colour frame	■20100106 □20100106B ■20100106C
Spare safety guard	■20100206 □20100206B ■20100206C
Iris diaphragm	20100706
Gobo holder, A/B size, metal	20100806
Hook clamp	20100900
Alu-grip clamp	20101100
Safety bond	20101200
Colour scroller Xpress 19	20106019 with mounting plate 20600006

## Photometric data

Narrow focus		CP90									
Beam dia.	1.7 1.8 2 2.1 2.2 2.4 2.5 2.7 2.8	m									
lux	2118 1805 1556 1356 1191 1055 941 845 763										
Distance	12 13 14 15 16 17 18 19 20	m									

Wide focus											
Beam dia.	1.9 2.3 2.7 3.1 3.5 3.9 4.3 4.7 5.1	m									
lux	6160 4278 3143 2406 1901 1540 1273 1069 911										
Distance	5 6 7 8 9 10 11 12 13	m									


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# nota<sup>®</sup> 8/22

## 650 - 1200W

### profile spotlight

part number : ■10853020 □10853021 ■10853022

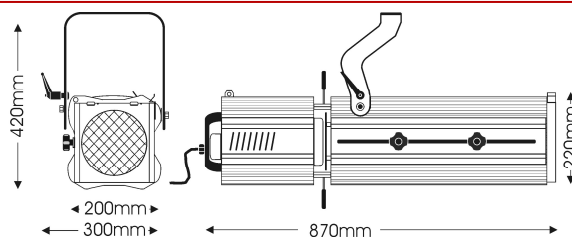

A high-specification 1000/1200W profile spotlight with advanced features including a double condenser optical system for extremely sharp gobo projection, rotating 4-shutter gate, 8° to 22° narrow-angle zoom focus, a double-microswitch interlock for safe lamp replacement, easy access for lens cleaning and a cranked fork. Ideal for front-of-house projection positions.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are all included as standard.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

Issue: ap ©2008. LDR reserves the right to alter the specification without prior notice.