

Application	
Beam style	well-defined, flat field profile projection
Suitable for	medium scale theatre
Specification level	professional range
Beam angle	18° - 36°
Typical throw distance	5 - 18m

Electrical specifications	
Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications	
Paint/Finish	black, white or silver epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	12.3kg / 15kg
Packed volume	0.11m <sup>3</sup>
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on bottom of lamp tube

Operational specifications	
Focus adjustment	slide zoom controls (dia. and softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

Lamp types	
650W 230V	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W 230V	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W 230V	CP90 3200K 240 hrs / T29 3000K 480 hrs
1000W 115/120V	T11 3050K 750 hrs GE88515

Accessories	
Spare metal colour frame	■ 20100106 □ 20100106B ■ 20100106C
Spare safety guard	■ 20100206 □ 20100206B ■ 20100206C
Iris diaphragm	20100707
Gobo holder, A/B size, metal	20100807
Hook clamp	20100900
Safety bond	20101300

Photometric data										
<b>Narrow focus</b>										<b>CP90</b>
Beam dia.	3.8	4.1	4.4	4.8	5.1	5.4	5.7	6.0	6.3	m
lux	1528	1302	1122	978	859	761	679	609	550	
Distance	12	13	14	15	16	17	18	19	20	m
<b>Wide focus</b>										
Beam dia.	4.5	5.2	5.8	6.5	7.1	7.8	8.4	9.1	9.7	m
lux	1082	828	654	530	438	368	314	270	236	
Distance	7	8	9	10	11	12	13	14	15	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# nota<sup>®</sup> 18/36 plus

## 650 -1200W

### profile spotlight


part number : ■ 10854030 □ 10854031 ■ 10854032

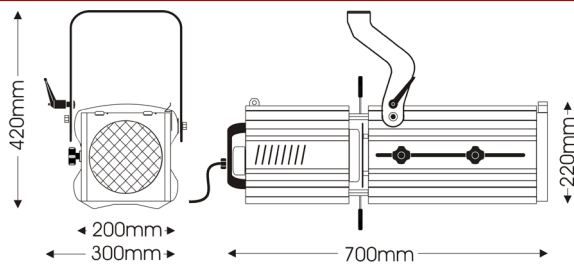

This wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection.

The comprehensive feature list includes 18° - 36° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute over-stage rigging angles and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2018. LDR reserves the right to alter the specification without prior notice.