

## Application

Beam style	variable-spread, well-defined soft beam
Suitable for	medium to large scale theatre
Specification level	professional range
Beam angle	8° - 60°
Typical throw distance	2 – 17m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	1.5m 3x1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black white or silver epoxy powder paint
Lamp house construction	extruded aluminium and sheet steel
Reflector	100mm diameter aluminium
Lens	150mm diameter Pebble-Convex
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	yes
Weight/Packed weight	6.2kg / 7.6kg
Packed volume	0.05m <sup>3</sup>
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 185x185mm, supplied
Lamp access	hinged base
Lens access	front and via lamp access

## Operational specifications

Focus adjustment	screw-focus with front and rear control
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional adjustment	single rim-clamp tilt lock

## Lamp types

650W 230V	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W 230V	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W 230V	CP90 3200K 240 hrs / T29 3000K 480 hrs
1000W 115/120V	T11 3050K 750 hrs GE88515

## Accessories

Spare metal colour frame	■20100106 □20100106B ■20100106C
Spare safety guard	■20100206 □20100206B ■20100206C
4-leaf barndoor, aluminium	■20100306 □20100306B ■20100306C □■20100306D ■20100306E
Hook clamp	20100900
Safety bond	20101300

## Photometric data

Spot focus										CP90
Beam dia.	0.9	1.0	1.2	1.3	1.4	1.5	1.6	1.7	1.8	m
lux	2437	1974	1632	1371	1168	1007	878	771	684	
Distance	9	10	11	12	13	14	15	16	17	m


Flood focus										½ P.A
Beam dia.	1.9	2.8	3.7	4.7	5.6	6.5	7.5	8.4	9.3	m
lux	4856	2159	1214	777	540	397	303	239	194	
Distance	2	3	4	5	6	7	8	9	10	m

Data in 1/10 P.A available on request.

**LUCI DELLA RIBALTA** PROFESSIONAL LIGHTING PRODUCTS

**nota<sup>®</sup> pc1200 plus**  
650W – 1200W  
pebble-convex

part number : ■10852000 □10852001 ■10852002

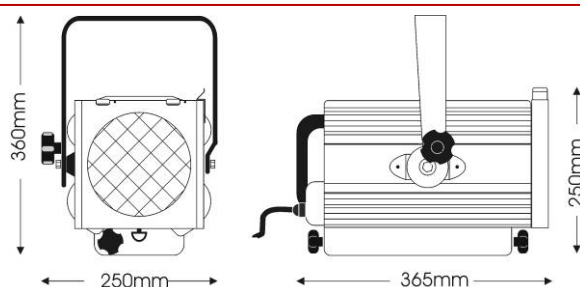

Quality 1/1200W pc spotlight with a screw focus variable-spread tight-edged beam, an easily adjustable lamp position for either 1000W or 1200W lamps, effective tilt lock and double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard and 1.5m mains cable are included as standard.

**Specials:** also available with polished pebble convex (PPC) lens part # 10852100



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.