

# ARIA F 1000 PLUS




- 10801000 black
- 10801001 white
- 10801002 silver



## COMPATIBLE LAMPS

<b>CP67</b>	<b>GX9.5</b>	650W	230V/240V	3200K	120hrs
<b>T21</b>	<b>GX9.5</b>	650W	230V/240V	3000K	900hrs
<b>CP70</b>	<b>GX9.5</b>	1000W	230V/240V	3200K	240hrs
<b>T19</b>	<b>GX9.5</b>	1000W	230V/240V	3050K	900hrs
<b>CP90</b>	<b>GX9.5</b>	1200W	230V/240V	3200K	240hrs
<b>T29</b>	<b>GX9.5</b>	1200W	230V/240V	3000K	480hrs

LDR recommends Philips lamps

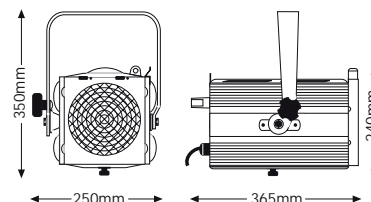

## ACCESSORIES

<b>20100106</b>	colour frame, black
<b>20100106B</b>	colour frame, white
<b>20100106C</b>	colour frame, silver
<b>20100306</b>	4-leaf barndoor, black
<b>20100306B</b>	4-leaf barndoor, white
<b>20100306C</b>	4-leaf barndoor, silver
<b>20100306D</b>	4-leaf barndoor, white/black
<b>20100306E</b>	4-leaf barndoor, silver/black
<b>20100900</b>	hook clamp
<b>20101100</b>	alu-grip clamp
<b>20101200</b>	safety bond
<b>20106019</b>	colour scroller Xpress 19

## PRODUCT SPECS

<b>lens type</b>	150 mm dia. Fresnel
<b>reflector</b>	100 mm dia. aluminium
<b>microswitch</b>	no
<b>colour frame</b>	185x185 mm
<b>throw</b>	2-15 m
<b>beam angle</b>	10°-56°
<b>weight</b>	5,6 kg

Quality, yet budget-priced, versatile 650W-1200W fresnel spotlight producing a variable-spread soft-edged beam. It is ideal for general stage lighting illumination in medium-sized venues and is supplied with a colour frame, safety guard and 1,5m mains cable. A full range of accessories in different colours is available as optional extra.

Versatile illuminatore fresnel da 1000/1200W, di gamma economica e tuttavia di elevato standard qualitativo, che produce un fascio di luce regolabile e dai bordi soffici. Particolarmente indicato per l'illuminazione generale di scena su distanze medio lunghe. Viene fornito di serie completo di telaio portagelatina, rete di protezione e 1,5m cavo di alimentazione, mentre un'ampia gamma di accessori è disponibile come optional.

## PHOTOMETRIC DATA CP90

spot	m Ø	1,2	1,4	1,6	1,7	1,9	2,1	2,3	2,4	2,6
	lux	2.612	2.000	1.580	1.280	1.058	889	757	653	569
	m	7	8	9	10	11	12	13	14	15
flood	m Ø	2,1	3,2	4,3	5,3	6,4	7,4	8,5	9,6	10,6
	lux	3.200	1.422	800	512	356	261	200	158	128
	m	2	3	4	5	6	7	8	9	10

