


TONO F 2000 PLUS

10901000 230V black

11901000 120V black

LDR
luci della ribalta

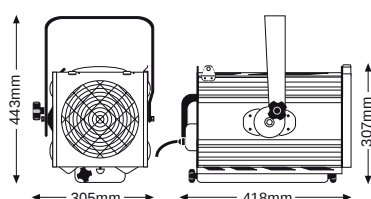

COMPATIBLE LAMPS

CP55	G22	2000W	230V/240V	3200K	48ohrs
CP75	G22	2000W	230V/240V	3200K	48ohrs
CP92	G22	2000W	230V/240V	3200K	40ohrs
CP72	GY16	2000W	230V/240V	3200K	48ohrs
CP91	G22	2500W	230V/240V	3200K	40ohrs
CYX	G38	2000W	120V	3200K	35ohrs

LDR recommends Philips lamps

Compact, lightweight and powerful 2/2.5KW fresnel spotlight. It features an extremely wide beam angle and includes a height adjustable, robust G22 lamp-base, screw focus, strong tilt lock and double microswitch interlock for safe lamp replacement. A colour frame, safety guard and 1,5m mains cable are included as standard.

PRODUCT SPECS

lens type
200mm dia. Fresnel

reflector
87,5mm dia. glass

microswitch
double-pole

colour frame
245x245mm

throw
3-20 m

beam angle
10°-70°

lamp base
G22 (230V) - G38 (120V)

weight
9,0 kg (230V) - 10,1 kg (120V)

Illuminatore fresnel da 2/2500W estremamente compatto, leggero e potente.

Dispone di robusto portalampada G22 regolabile in altezza, messa a fuoco di precisione con vite senza fine, bloccaggio forcella a frizione e doppio microinterruttore di sicurezza. Fornito di serie completo di telaio portagelatina, rete di protezione e 1,5m cavo di alimentazione.

ACCESSORIES

20100107	colour frame, black
20100307	4-leaf barndoor, black
20101000	hook clamp HD
20101100	alu-grip clamp
20101200	safety bond
20106026	colour scroller Xpress 26



PHOTOMETRIC DATA CP75

spot	m Ø	2,3	2,5	2,7	2,9	3,1	3,3	3,5	3,7	3,9
	lux	1.563	1.331	1.148	1.000	879	779	694	623	563
	m	12	13	14	15	16	17	18	19	20
flood	m Ø	4,2	5,6	7,0	8,4	9,8	11,2	12,6	14,0	15,4
	lux	2.200	1.238	792	550	404	309	244	198	164
	m	3	4	5	6	7	8	9	10	11

On request also available with GY16 lamp-base (230V only).

Su richiesta disponibile anche con porta-lampada GY16 (solo 230V).