

NOTA 8/22


10853020 black
 10853021 white
 10853022 silver



COMPATIBLE LAMPS

CP67	GX9.5	650W	230V/240V	3200K	120hrs
T21	GX9.5	650W	230V/240V	3000K	900hrs
CP70	GX9.5	1000W	230V/240V	3200K	240hrs
T19	GX9.5	1000W	230V/240V	3050K	900hrs
CP90	GX9.5	1200W	230V/240V	3200K	240hrs
T29	GX9.5	1200W	230V/240V	3000K	480hrs

LDR recommends Philips lamps

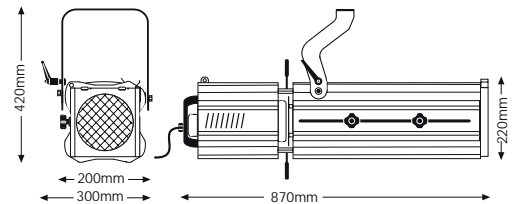

ACCESSORIES

20100106	colour frame, black
20100706	iris diaphragm
20100806	gobo holder, A/B size
20100900	hook clamp
20101100	alu-grip clamp
20101200	safety bond
20106019	colour scroller Xpress 19

PRODUCT SPECS

optical system
 double condenser+zoom

reflector
 68mm dia. glass

microswitch
 double-pole

colour frame
 185x185mm


throw
 5-25m

beam angle
 8°-22°

weight
 14,3kg

A high-specification 1000/1200W profile spotlight with advanced features including a double condenser optical system for extremely sharp gobo projection, rotating 4-shutter gate, 8° to 22° narrow-angle zoom focus, a double-microswitch interlock for safe lamp replacement, easy access for lens cleaning and a cranked fork. Ideal for front-of-house projection positions. A colour frame, safety guard, 4 beam shutters and 2m mains cable are all included as standard.

Sagomatore da 1000/1200W ad angolo stretto e dall'elevato profilo tecnico-qualitativo. Dispone di ottica primaria a doppio condensatore per una precisa proiezione gobo, di gruppo centrale girevole, ottica secondaria a tre elementi, doppio microinterruttore e blocco forcilla a leva. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.

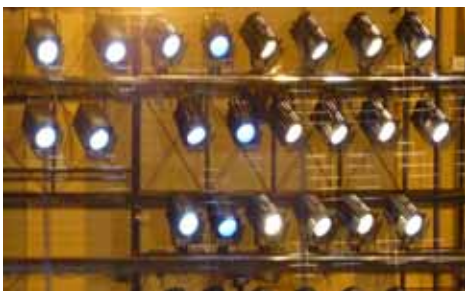

PHOTOMETRIC DATA CP90

narrow	m Ø	1,7	1,8	2	2,1	2,2	2,4	2,5	2,7	2,8
	lux	2.118	1.805	1.556	1.356	1.191	1.055	941	845	763
	m	12	13	14	15	16	17	18	19	20
wide	m Ø	1,9	2,3	2,7	3,1	3,5	3,9	4,3	4,7	5,1
	lux	6.160	4.278	3.143	2.406	1.901	1.540	1.273	1.069	911
	m	5	6	7	8	9	10	11	12	13

