

NOTA 18/36




- 10853030 black
- 10853031 white
- 10853032 silver



COMPATIBLE LAMPS

CP67	GX9.5	650W	230V/240V	3200K	120hrs
T21	GX9.5	650W	230V/240V	3000K	900hrs
CP70	GX9.5	1000W	230V/240V	3200K	240hrs
T19	GX9.5	1000W	230V/240V	3050K	900hrs
CP90	GX9.5	1200W	230V/240V	3200K	240hrs
T29	GX9.5	1200W	230V/240V	3000K	480hrs

LDR recommends Philips lamps

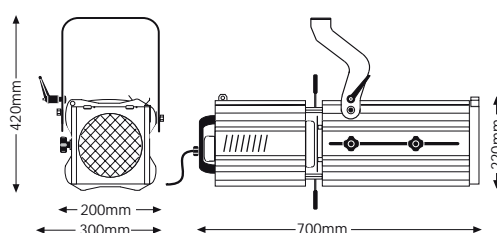

ACCESSORIES

20100106	colour frame, black
20100706	iris diaphragm
20100806	gobo holder, A/B size
20100900	hook clamp
20101100	alu-grip clamp
20101200	safety bond
20106019	colour scroller Xpress 19

PRODUCT SPECS

optical system
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

colour frame
185x185mm

throw
5-18m

beam angle
18°-36°

weight
12,3 kg



This wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection. The comprehensive feature list includes 18° - 36° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute overstage rigging angles and a double-microswitch interlock for safe lamp replacement. A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 1000/1200W ad angolo largo e dall'elevato profilo tecnico-qualitativo. Dispone di ottica primaria a doppio condensatore per una precisa proiezione gobo, di gruppo centrale girevole, ottica secondaria a tre elementi, doppio microinterruttore e blocco forcilla a leva. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.



PHOTOMETRIC DATA CP90

narrow	m Ø	3,8	4,1	4,4	4,8	5,1	5,4	5,7	6,0	6,3
	lux	1.528	1.302	1.122	978	859	761	679	609	550
	m	12	13	14	15	16	17	18	19	20
wide	m Ø	4,5	5,2	5,8	6,5	7,1	7,8	8,4	9,1	9,7
	lux	1.082	828	654	530	438	368	314	270	236
	m	7	8	9	10	11	12	13	14	15