

# TONO 18/36


10903030 black



## COMPATIBLE LAMPS

**CP72 GY16** 2000W 230V/240V 3200K 48ohrs

LDR recommends Philips lamps

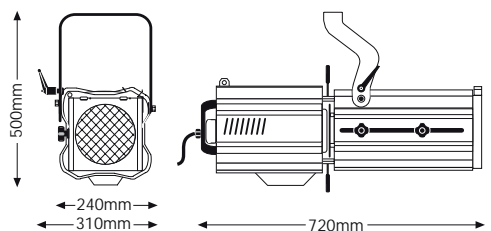

## ACCESSORIES

<b>20100106</b>	colour frame, black
<b>20100706</b>	iris diaphragm
<b>20100806</b>	gobo holder, A/B size
<b>20100900</b>	hook clamp
<b>20101100</b>	alu-grip clamp
<b>20101200</b>	safety bond
<b>20106019</b>	colour scroller Xpress 19

## PRODUCT SPECS

**optical system**  
double condenser+zoom

**reflector**  
68mm dia. glass

**microswitch**  
double-pole

**colour frame**  
185x185mm

**throw**  
6-23m

**beam angle**  
18°-36°

**weight**  
14 kg



For closer projection in larger venues, this wide-angle 18° - 36° 2000W spotlight incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 2000W ad angolo largo per l'impiego in grandi installazioni che richiedano un'eccezionale qualità ottica. Oltre che di un doppio condensatore ottico dispone di alloggiamento ghigliottine girevole, blocco forcella a leva e doppio microinterruttore.

Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatici e 2m cavo di alimentazione.



## PHOTOMETRIC DATA CP72

	m Ø	2,5	3,2	3,8	4,4	5,1	5,7	6,3	7,0	7,6
narrow	lux	4.328	2.770	1.924	1.413	1.082	855	693	572	481
	m	8	10	12	14	16	18	20	22	24
	m Ø	3,9	5,2	6,5	7,8	9,1	10,4	11,7	13,0	14,3
wide	lux	5.556	3.152	2000	1389	1020	781	617	500	413
	m	6	8	10	12	14	16	18	20	22