

Application

Beam style	symmetric flood
Suitable for	small-scale theatre, general floodlighting
Specification level	professional range
Typical throw distance	2 - 5m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	500W
Lamp base	R7s
Auto-disconnect	single-pole microswitch
Cable/connection	1.5m, 3 x 1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment, may be coupled together with identical units to create a 2/3/4 compartment batten, available accessories for domino assembling.
Reflector	symmetrical, aluminium
Mounting & suspension	supplied without stirrup- see list of separate hanging accessories available
Weight/Packed weight	2,4kg / 2,9kg
Packed volume	0.017m ³
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety glass	supplied
Colour frame	metal, 244 x 195mm supplied
Lamp access	front access

Operational specifications

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side when mounted in batten

Lamp types

160W	Plusline ES Small R7s 230V 3100lm 2.000 hrs
240W	Plusline ES Small R7s 230V 4900lm 2.000 hrs
400W	Plusline ES Small R7s 230V 8700lm 2.000 hrs

Accessories

Spare metal colour frame	■ 20100121 □ 20100121B ■ 20100121C
3-leaf barndoor	■ 20100620 □ 20100620B ■ 20100620C □ ■ 20100620D ■ 20100620E
2-leaf barndoor	■ 20100520 □ 20100520B ■ 20100520C □ ■ 20100520D ■ 20100520E
Clear safety glass	20101420
Safety guard	20100220
Kit for square mounting	20101920
Stirrup kit 1 Rima	20102621
Kit linear mounting 2 Rima	20102622
Kit linear mounting 3 Rima	20102623
Kit linear mounting 4 Rima	20102624
Hook clamp	20100900
Safety bond	20101300

Photometric data

Horizontal		ES400									
Beam dia.		3.2	4.9	6.5	8.1	9.7	11.3	13	14.6	16.2	m
lux		913	406	228	146	101	74	57	45	37	
Distance		2	3	4	5	6	7	8	9	10	m

Vertical											
Beam dia.		1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5	m
lux		1345	598	336	215	149	110	84	66	54	
Distance		2	3	4	5	6	7	8	9	10	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

rima[®] S500 Pro no stirrup

200 - 500W

symmetric floodlight

part number: ■ 10516160 □ 10516161 ■ 10516162

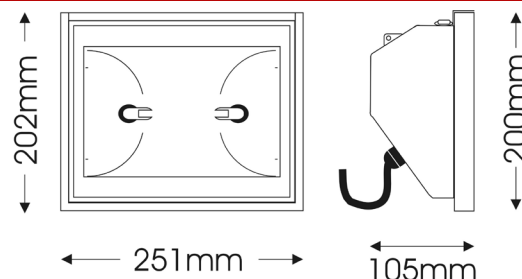

Stylish and high specification 500W symmetric floodlights, ideal for all applications where a wide, even wash of light is required.

The modular design enables several units to be coupled together to form a single compartment or square batten. Accurate design prevents any light spill.

A colour frame, a single microswitch interlock for safe lamp replacement, a safety glass and 1.5m mains cable are supplied as a standard whereas a large choice of accessories is available as optional extras.

Available to special order with extended front chassis for longer gel life.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.