

Application

Beam style	asymmetric flood
Suitable for	cyclorama lighting in all applications
Specification level	professional range
Typical throw distance	0.5m – 3m from lit surface

Electrical specifications

Light source	12x 10W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.45A @ 230V AC or 0,95 A @ 110V AC
Power consumption	130W at full power
Cable/connection	Neutrik powercon IN and OUT
Power cable	1.6m 3x1.5mm power cable with fitted powercon, supplied
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint. On demand also available in any colour of the RAL range
Construction	aluminium and steel-sheet body
Reflector	asymmetrical proprietary curve, specular aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting
Colour frame	included
Safety glass	included
Weight/Packed weight	5kg / 7kg
Packed volume	0.069m ³

Operational specifications

Working position	any, stand-alone or hung, any tilting
DMX channels / connection	6 or 7 ch / XLR5 connectors, IN/OUT
Colours	white 3200K
Dimming	From rear panel encoder or remote, 8 or 16 bits via DMX signal
LED temperature	Built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available: Silent/Auto/Constant
Fade curves	2 curves (linear, square)
LED Frequency	16KHz – Flicker free
LCD display	Set-up, dmx, monitor, diagnostics
RDM	Integrated
Software upload	Remote, via DMX 512 cables

Accessories

4-leaf barndoor, black	20100450
Spare colour frame	20100122
Spare clear safety glass	20101460
Remoto	20702072 Gateway for software upload
Hook clamp	20100900
Safety bond	20101300

Photometric data – measured at ½ peak angle

Horizontal (H)	0.8	1.5	2.3	3.1	3.8	4.6	m
Vertical (V)	1.2	2.4	3.6	4.8	6.0	7.2	m
WHITE	4830	1208	537	302	193	134	lux
Distance(D)	0.5	1	1.5	2	2.5	3	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

SAMBA A100

120W LED 3200K

asymmetric floodlight

part # 01106050 01106051 01106052

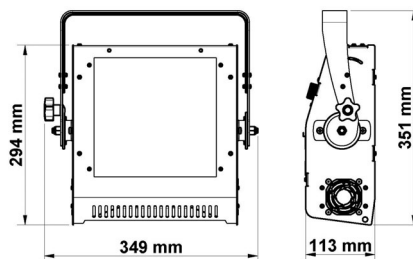

120 watt LED 3200K asymmetrical floodlight ideal for cyclorama-type lighting in all applications.

SAMBA is an elegant, compact, light-weight fixture which can be installed in any position, either stand-alone or hung from a truss even on very small stages or locations with reduced space.

Utilizing a multi functional display or DMX / RDM interface for ease of operation, it provides a high precision multicurve dimming system along with pure colour mixing throughout all fields of colours.

The Samba is energy efficient, reliable, and built to last and is also available in LED RGBW



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2021 LDR reserves the right to alter the specification without prior notice.