

Application

Beam style	well-defined, flat field profile projection
Suitable for	large scale theatre
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	4 - 12m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cooling	low-noise fan-assisted ventilation
Cable/connection	2m, 3 x 2.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	13,7 kg / 16,5kg
Packed volume	0.11m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

Lamp types

2000W	CP72 GY16 230/240V 3200K 480 hrs
-------	----------------------------------

Accessories

Lamps	see above
Spare metal colour frame	20100106
Spare safety guard	20100206
Iris diaphragm	20100707
Gobo holder, A/B size, metal	20100807
Hook clamp HD	20101000
Safety bond	20101300

Photometric data

Narrow focus										CP72
Beam dia.	2.1	2.7	3.2	3.8	4.3	4.8	5.4	5.9	6.4	m
lux	6263	4008	2783	2045	1566	1237	1002	828	696	
Distance	4	5	6	7	8	9	10	11	12	m


Wide focus

Beam dia.	4.2	5.2	6.2	7.3	8.3	9.4	10.4	11.5	12.5	m
lux	2406	1540	1069	786	602	475	385	318	267	
Distance	4	5	6	7	8	9	10	11	12	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

tono[®] 30/55 plus 2000W profile spotlight

part number : 10904040 10904041 10904042

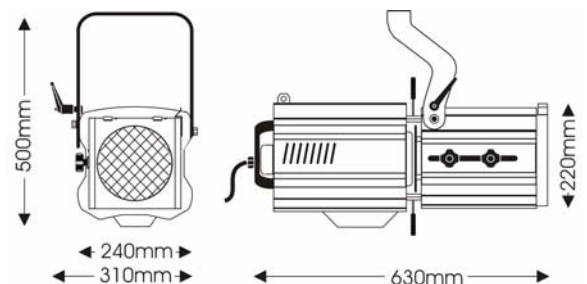

Extremely wide-angle 2000W profile spotlight for very close projection in larger venues.

It incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2018. LDR reserves the right to alter the specification without prior notice.