

Application

Beam style	well defined, flat-field profile projection
Suitable for	theatres, TV studios, architectural and commercial applications
Specification level	professional range
Beam angle	10° - 28°
Typical throw distance	2 – 10m

Electrical specifications

Light source	89W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.3A
Power consumption	100W at full power
Cable/connection	1,6m mains cable with fitted Neutrik Power-con IN and OUT, supplied
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Lamp House Construction	extruded aluminium and sheet steel
Mounting & suspension	steel stirrup 12mm centre hole + DIN mounting.
Handle	rear
Weight/Packed weight	9,7 kg / 11,6 kg
Colour frame	metal, 125 x 125mm, supplied

Operational specifications

Focus adjustment	slide zoom controls (diameter and softness) at side
Beam Shaping	4 shutter blades, supplied + iris diaphragm, accessory
DMX channels / connection	1 to 4 / XLR5 connectors, IN/OUT
Dimmer module	PWM (Pulse Width Modulation), 8 or 16 bits
Dimming	manual, from rear panel or remote, through control desk via DMX signal
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	automatically set and controlled
Fade curves	4 curves (linear, square, LED-HAL, User 1)
LED Frequency	LED frequency control for TV cameras ranging from 3KHz to 460Hz. Manually selectable from rear panel or remotely controlled through DMX

Optical specifications

Optical system	double condenser with variable zoom
LED array	89W, white, round-shaped, replaceable
Rated LED life	25,000 hours at 25°C
Beam colour temperature	3200K or 5600K
CRI (Colour Rendering Index)	>90

Accessories

Spare metal colour frame	■ 20100102 □ 20100102B ■ 20100102C
Iris diaphragm	20100707 Gobo holder, M/D size 20100801
Hook clamp	20100900 Safety bond 20101300

Photometric data

Spot	3200K – 109 lm/W (at 2100mA)									
Beam dia.	0.3	0.5	0.7	0.9	1.0	1.2	1.4	1.6	1.7	m
lux	11250	5000	2813	1800	1250	918	703	556	450	
Distance	2	3	4	5	6	7	8	9	10	m

Flood										
Beam dia.	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	m
lux	4500	2000	1125	720	500	367	281	222	168	
Distance	2	3	4	5	6	7	8	9	10	m


Spot	5600K – 120 lm/W (at 2100mA)									
Beam dia.	0.3	0.5	0.7	0.9	1.0	1.2	1.4	1.6	1.7	m
lux	14750	6556	3688	2360	1639	1204	922	728	590	
Distance	2	3	4	5	6	7	8	9	10	m

Flood										
Beam dia.	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	m
lux	6250	2778	1563	1000	694	510	391	309	250	
Distance	2	3	4	5	6	7	8	9	10	m

cetra 10/28

89W, 100/260VAC, DMX512
narrow-angle LED profile

part # ■ 01104020 □ 01104021 □ 01104022 3200K
part # ■ 01104120 □ 01104121 □ 01104122 5600K

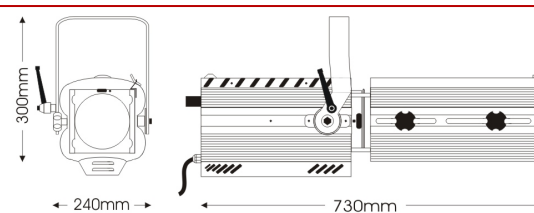

Stylish, compact and high efficiency 100W white led narrow-angle profile spotlight featuring double-condenser optics and a PWM dimming power source. Cetra 10/28 is DMX controllable for 16 bit dimming and infinite colour beams.

Cetra is ideal in all those applications where heat and energy saving are a concern. Its attractive design makes it the obvious choice in shop displays, art displays, churches and architectural applications where a theatrical-type luminaire is needed.

All models in the Cetra range are available in 3200K and 5600K white light, RGBW and TW, in a choice of 3 finishes: black, white and silver and 2 stirrups: manual and pole-operated

A full range of accessories complements the range.

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
www.ldr.it info@ldr.it
issue: ap ©2022. LDR reserves the right to alter the specification without prior notice.