

## Application

Beam style	variable-spread, soft-edged beam
Suitable for	theatres, TV studios, architectural and commercial applications
Specification level	professional range
Beam angle	12° - 60°
Typical throw distance	2 – 10m

## Electrical specifications

Light source	89W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.3A
Power consumption	100W at full power
Cable/connection	Neutrik powercon IN and OUT
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Construction	extruded aluminium and steel sheet
Mounting & suspension	Pole-operated stirrup with spigot, 360° rotation
Handle	rear
Weight/Packed weight	5,9 kg / 7,10kg
Colour frame	metal, 150 x 150mm, supplied

## Operational specifications

Focus adjustment	screw focus with control at rear
Beam Shaping	using barndoor accessory
DMX channels / connection	1 to 4 / XLR5 connectors, IN/OUT
Dimmer module	PWM (Pulse Width Modulation), 8 or 16 bits
Dimming	manual, from rear panel or remote, through control desk via DMX signal
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	automatically set and controlled
Fade curves	4 curves (linear, square, LED-HAL, User 1)
LED Frequency	LED frequency controls for TV cameras ranging from 3KHz to 460Hz. Manually selectable from rear panel or remotely controlled through DMX

## Optical specifications

Optical system	120mm diameter high quality borosilicate Fresnel lens
LED array	89W, white, round-shaped, replaceable
Rated LED life	25,000 hours at 25°C
Beam colour temperature	3200K or 5600K
CRI (Colour Rendering Index)	>90

## Accessories

Metal colour frame	■ 20100103 □ 20100103B □ 20100103C
4-leaf barndoor	■ 20100301 □ 20100301B □ 20100301C
Safety bond	20101300

## Photometric data

Spot										3200K
Beam dia.	0.4	0.6	0.8	1.1	1.3	1.5	1.7	1.9	2.1	m
lux	10237	4550	2560	1638	1137	836	639	505	409	
Distance	2	3	4	5	6	7	8	9	10	m

Flood										
Beam dia.	2.1	3.1	4.2	5.2	6.2	7.3				m
lux	1575	700	394	252	175	128				
Distance	2	3	4	5	6	7				m

Spot										5600K
Beam dia.	0.4	0.6	0.8	1.1	1.3	1.5	1.7	1.9	2.1	m
lux	12337	5483	3084	1974	1371	1007	770	609	494	
Distance	2	3	4	5	6	7	8	9	10	m


Flood										
Beam dia.	2.1	3.1	4.2	5.2	6.2	7.3				m
lux	1838	817	460	294	204	150				
Distance	2	3	4	5	6	7				m

**LUCI DELLA RIBALTA** PROFESSIONAL LIGHTING PRODUCTS

# cetra f100 PO

89W, 100/260VAC, DMX512  
led fresnel luminaire

part # ■ 02101000 □ 02101001 □ 02101002 3200K  
part # ■ 02101100 □ 02101101 □ 02101102 5600K

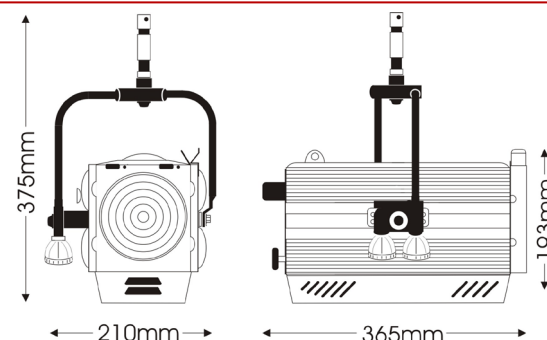

Stylish, compact and extremely high efficiency 89W led fresnel luminaire featuring a PWM dimming power source and a PO stirrup for the control of pan and tilt movement.

Cetra is ideal in all those applications where heat and energy saving are a concern. Its attractive design makes it the obvious choice in shop displays, art displays and architectural applications where a theatrical-type luminaire is needed.

Cetra is also available in RGBW colour mixing, with black, white or silver paint finish.

A full range of accessories complements the range.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.