

## Application

Beam style	well-defined, flat field projection
Suitable for	theatres, TV studios, permanent shows, worship venues, music bars and restaurants, sport-halls
Specification level	professional range
Beam angle	8°- 22° Typical throw distance 6 – 32m

## Electrical specifications

Light source	380W LED, RGBW
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 1.17A @ 230v ac- 2.35A @ 110V AC
Power consumption	250W at full power, 9W in sleep mode
USB PSU	integrated; allows re-charging of mobile device during operation
Cable/connection	2.2m, 3 x 1.5mm <sup>2</sup> cable, Power-con to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Construction	extruded aluminium and sheet steel
Mounting	steel stirrup with 12mm centre hole and DIN mounting, spigot for ø29mm tripod supplied
Pan & Tilt control	2 side-handles head to rear
Weight/Packed weight	21.0 kg / 26.0 kg

## Operational specifications

Focus adjustment	slide zoom controls (diameter and softness) at side
DMX channels/connection	6 or 7 ch/ XLR5 connectors, IN/OUT
RDM	integrated
WI-FI	integrated
Colour	RGBW + 10 preset whites (2700K to 5800K) from a dedicated DMX channel
Colour control	by Android or IOS mobile device connected to proprietary Wi-Fi access point (1 device only – 12m) or remote DMX512-RDM
Dimming	positionable external activator Clamp-on dimmer, supplied or remote DMX 8 or 16 bits
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available Silent/Auto/Constant
Fade curves	2 curves (linear, square)
LED Frequency	16KHz – flicker-free
LCD display	set-up, DMX, monitor, diagnostics
Software upload	remote, via DMX 512 cables

## Optical specifications

Optical system	double condenser with variable zoom
LED array / rated life	RGBW, replaceable
Rated LED life	50,000 hours at 25°C, maintains 70% of original intensity
Beam colour temperature	Any, from RGBW colour mixing
CRI (Colour Rendering Index)	>90

## Accessories

Spare iris diaphragm	20100707	Gobo holder A/B size	20100807
Black tripod	20102401	Black tripod LEV-LEG	20102400
Spare spigot ø29mm	20102200	Spigot w/fluid head	20102100
Flight case	20107180	Remoto	20702072
Clamp-on digital dimmer	20702071	supplied	
Clamp-on universal phone holder	20702073	supplied	
Clamp-on Android mobile phone, pre-loaded app/colour library			20702074

## Photometric data

Narrow beam(1/2 P.A.)		RGBW						at 1300mA		
Beam dia.		1.1	1.7	2.2	2.8	3.4	3.9	4.2	4.5	m
R		1047	465	261	167	117	85	75	65	lux 18,2 lm/W
G		2494	1108	624	399	277	204	177	155	lux 53,1 lm/W
B		541	240	135	86	60	44	39	34	lux 14,2 lm/W
W		5102	2268	1275	817	567	417	363	319	lux 79,7 lm/W
Full		5283	2348	1321	845	587	432	376	330	lux
Distance		8	12	16	20	24	28	30	32	m

## Wide beam(1/2 P.A.)

Beam dia.	1.6	1.9	2.3	2.7	3.1	3.5	3.9	m
R	774	496	343	252	193	153	124	lux 18,2 lm/W
G	1791	1147	796	585	448	354	286	lux 53,1 lm/W
B	382	244	169	124	95	76	61	lux 14,2 lm/W
W	3792	2428	1685	1238	948	749	607	lux 79,7 lm/W
Full	3846	2461	1709	1256	962	759	615	lux
Distance	4	5	6	7	8	9	10	m

**LUCI DELLA RIBALTA** PROFESSIONAL LIGHTING PRODUCTS


**astro 250 CM wi-fi HP**

**MK2**

**380W, 100/260VAC, DMX512 + RDM**

**RGBW LED followspot**

part # ■ 01207390 Kit K01207390

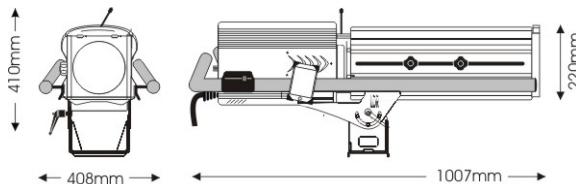

Astro HP is the high-performance version of the popular ASTRO followpot. Fitted with a new, custom-designed optics which dramatically enhances the light output, the Astro HP is suitable for medium-long throws in all followspot applications.

Stylish, compact and extremely high efficiency the RGBW Astro HP followspot can boast unique features allowing for precision and user-friendly control in any situation.

- Colour Control by Android – via Artnet Controller App - or IOS – via Luminair App - mobile device connected to proprietary wi-fi access point (1 device only, 12m range) or remote DMX512-RDM
- USB port provided to re-charge your mobile device while operating the followspot
- Clamp-on universal mobile phone holder, 3.5/6.5in, rotatable 360°, supplied
- Clamp-on digital dimmer, positionable along the side bars to suit any operator's needs, supplied
- Android mobile phone, with pre-loaded proprietary colour library, on demand
- Free proprietary colour library available for download from our website for those using own mobile device

A recently-added new feature allows to choose from 10 pre-set whites, ranging from 2700K to 5800K, using a dedicated DMX channel.

Astro HP is available with 3200K, 5600K and RGBW CT. Standard delivery also includes iris diaphragm and spigot, whereas the kit version also includes a black followspot tripod, clamp-on digital dimmer and ATA approved stackable flight case.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

Issue: ap ©2026. LDR reserves the right to alter the specification without prior notice.