

Application

Beam style	well-defined, flat field profile projection
Suitable for	small, medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 20m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	epoxy powder paint, black or white
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø29mm tube supplied
Handle	rear and side
Weight/Packed weight	18kg / 22,4kg
Packed volume	0.204m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, accessory
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/ softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs
-------	--

Accessories

Metal colour frame+ front runners	■20109106
5-colour colour changer	■20105106 □20105106B ■20105105 left-handed
6-colour colour changer	■20105206
Spare iris diaphragm	20100707
Gobo holder, A/B size	20100807 Gobo holder, B, dichro 20100807B
Black tripod	20102401
Black tripod LEV-LEG	20102400
Spare spigot ø29mm	20102200
Spigot with fluid head	20102100
Kit 1-hand control iris/dowser	20107070
Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod

Photometric data


Narrow focus										CP90
Beam dia.	1.7	1.8	2	2.1	2.2	2.4	2.5	2.7	2.8	m
lux	2118	1805	1556	1356	1191	1055	941	845	763	
Distance	12	13	14	15	16	17	18	19	20	m

Wide focus										
Beam dia.	3.9	4.3	4.7	5.1	5.4	5.8	6.2	6.6	7	m
lux	1540	1273	1069	911	786	684	602	533	475	
Distance	10	11	12	13	14	15	16	17	18	m

Canto® 1200th MK2

1200W, 230/240V TH
followspot

part number : ■10857170 □10857171

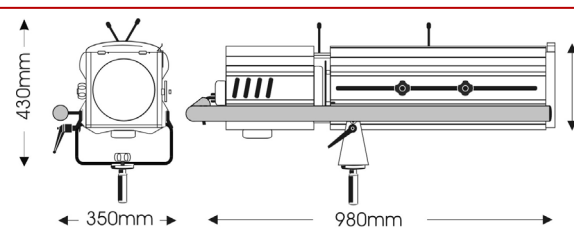


Compact, short to medium throw 1200W tungsten-halogen followspot. It features a large, user-friendly side handle, strong mechanics and excellent optics.

Standard delivery includes a colour frame, 20-leaf iris diaphragm, mechanical dimmer, spigot and 2m mains cable. A large selection of accessories, including a 5-colour colour changer, tripods and a flight-case, is available for the Canto range

Specials: also available in kit, including followspot, CP90 lamp, fitted colour changer, black tripod and flight case

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
www.ldr.it info@ldr.it

issue: ap ©2022. LDR reserves the right to alter the specification without prior notice