

Application

Beam style	well-defined, flat field profile projection
Suitable for	large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 30m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/white epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø29mm tube supplied
Handle	one, covering rear and side of the followspot
Weight/Packed weight	28,9kg / 63,5kg
Packed volume	0.48m ³
Accessory runners	3 slots, accessory
Colour frame	metal, 185 x 185mm, accessory
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	by mains supply + manual dowser, included
Positional adjustment	lever tilt clamp

Lamp types

2000W	CP72 GY16 230/240V 3200K 400 hrs
-------	----------------------------------

Accessories

Metal colour frame+ front runners	■20109106
5-colour colour changer	■20105106 (included) ■20105105 left-handed
6-colour colour changer	■20105206
Spare iris diaphragm	20100707
Gobo holder, A/B size	20100807 Gobo holder, B, dichro 20100807B
Black tripod	20102401
Black tripod LEV-LEG	20102400
Spare spigot ø29mm	20102200
Spigot with fluid head	20102100
Kit 1-hand control iris/dowser	20107070
Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod

Photometric data

Narrow focus										CP72
Beam dia.	2.0	2.2	2.5	2.8	3.1	3.4	3.6	3.9	4.2	m
lux	2443	1870	1478	1197	989	831	708	611	532	
Distance	14	16	18	20	22	24	26	28	30	m


Wide focus										
Beam dia.	3.9	4.7	5.4	6.2	7.0	7.8	8.6	9.3	10.1	m
lux	2000	1389	1020	781	617	500	413	347	296	
Distance	10	12	14	16	18	20	22	24	26	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto® 2000TH MK2 Kit

2000W, 230/240V
TH followspot


part number : ■ K10907171

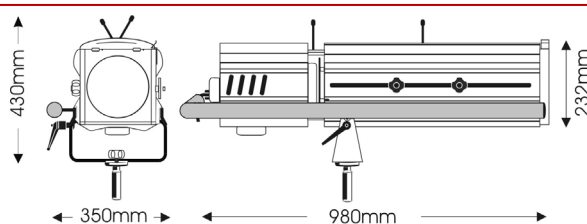

The most powerful dimmable tungsten halogen followspot in the range, the Canto® 2000 TH MK2 is the professionals' choice for applications in larger venues where a warm beam is required. It features a large, user-friendly side-handle, strong mechanics and excellent optics.

The Canto® 2000 TH MK2 kit includes

- 20-leaf iris diaphragm
- Built-in dowser
- Spigot for 29mm dia tripod heads
- Black followspot tripod
- CP72 GY16 3200K 400hrs lamp
- 5-colour colour changer, fitted
- ATA approved flight case on braking wheels



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
www.ldr.it info@ldr.it

issue: ap ©2022 LDR reserves the right to alter the specification without prior notice