

## Application

Beam style	variable-spread, tight-edged beam
Suitable for	theatre, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 58°
Typical throw distance	2 – 10m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	650W
Lamp base	GY9.5
Auto-disconnect	no
Cable/connection	1.5m, 3x1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	55mm diameter glass
Lens	120mm diameter Pebble-Convex
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	yes
Weight/Packed weight	4.2kg / 4.8kg
Packed volume	0.021m <sup>3</sup>
Filter cut size	150 x 150mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

## Operational specifications

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional adjustment	single rim-clamp tilt lock

## Lamp types

300W 230V	M38 2950K 2000 hrs
500W 230V	T18 3000K 360 hrs / T25 3000K 360 hrs / M40 2950K 2.000 hrs
650W 230V	T26 3050K 600 hrs / T27 3050K 600 hrs
300W 120V	CP81 FKW 3200K 50 hrs
650W 120V	CP89 FKR 3200K 200 hrs

## Accessories

Spare metal colour frame	■20100103 □20100103B ■20100103C
Spare safety guard	■20100203 □20100203B ■20100203C
4-leaf barndoor	■20100301 □20100301B ■20100301C □■20100301D ■20100301E
Hook clamp	20100900
Safety bond	20101300

## Photometric data

Spot focus										T27
Beam dia.	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2	m
lux	24800	11022	6200	3968	2756	2024	1550	1225	992	
Distance	2	3	4	5	6	7	8	9	10	m


Flood focus										
Beam dia.	2.2	3.3	4.4	5.5	6.7	7.8	8.9	10	11.1	m
lux	2148	955	537	344	239	175	134	106	86	
Distance	2	3	4	5	6	7	8	9	10	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# tempo<sup>®</sup> pc 650 plus

## 650W pebble-convex

part number : ■10602000 □10602001 ■10602002

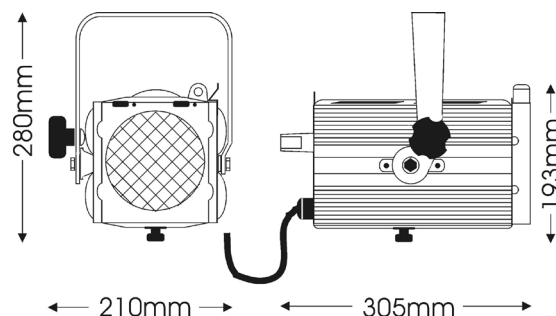

Simple yet high-quality 650W PC spotlight featuring a slide-focus variable-spread beam to offer more definition than the softer Fresnel beam.

Tempo pc650 plus is ideal for close projection in small stage venues and whenever budget is a priority. A colour frame, safety guard and 1.5m mains cable are all included as standard.

**Specials:** also available with polished pebble convex (PPC) lens part # 10602100



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777

[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.