

## Application

Beam style	well-defined, flat field profile projection
Suitable for	long-throw applications in large scale theatres and venues
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	4 – 12m

## Electrical specifications

Supply Volts	120/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cooling	low-noise fan-assisted ventilation
Cable/connection	2m, 3 x 2.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, borosilicate
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	13,7 kg / 16,5kg
Packed volume	0.11m <sup>3</sup>
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	from rear, sliding top cover
Lens access	sliding panels on bottom of lens-tube

## Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

## Lamp types

2000W 230/240V	CP72 GY16 3200K 480 hrs
2000W 120V	CP79 2200K 400hrs GE88440

## Accessories

Lamps	see above
Spare metal colour frame	20100106
Spare safety guard	20100206
Iris diaphragm	20100707
Gobo holder, A/B size, metal	20100807
Hook clamp HD	20101000
Safety bond	20101300

## Photometric data

Narrow focus											CP72
Beam dia.	2.1	2.7	3.2	3.8	4.3	4.8	5.4	5.9	6.4	m	
lux	6263	4008	2783	2045	1566	1237	1002	828	696		
Distance	4	5	6	7	8	9	10	11	12	m	




Wide focus											
Beam dia.	4.2	5.2	6.2	7.3	8.3	9.4	10.4	11.5	12.5	m	
lux	2406	1540	1069	786	602	475	385	318	267		
Distance	4	5	6	7	8	9	10	11	12	m	


**LUCI DELLA RIBALTA** PROFESSIONAL LIGHTING PRODUCTS

# tono<sup>®</sup> 30/55 *plus*

## 2000W

### profile spotlight


part number :  10904040  10904041  10904042

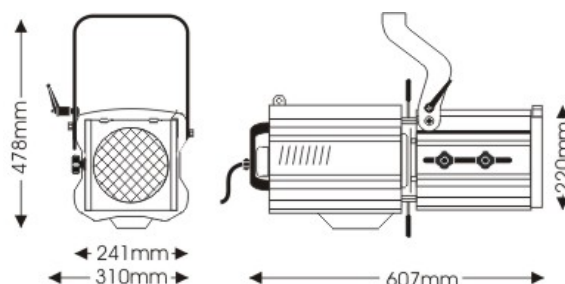

Extremely wide-angle 2000W profile spotlight for very close projection in larger venues.

It incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.