

Application

Beam style	well-defined, flat field profile projection
Suitable for	long-throw applications in large scale theatres and venues
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	6 – 30m

Electrical specifications

Supply Volts	120/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cooling	low-noise fan-assisted ventilation
Cable/connection	2m, 3 x 2.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, borosilicate
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	14.7kg / 18.0kg
Packed volume	0.17m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	from rear, sliding top cover
Lens access	sliding panels on bottom of lens-tube

Operational specifications

Focus adjustment	slide zoom controls (dia. and softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

Lamp types

2000W 230/240V	CP72 GY16 3200K 480 hrs
2000W 120V	CP79 2200K 400hrs GE88440

Accessories

Lamps	see above
Spare metal colour frame	20100106
Spare safety guard	20100206
Iris diaphragm	20100707
Gobo holder, A/B size, metal	20100807
Hook clamp HD	20101000
Safety bond	20101300

Photometric data

Narrow focus										CP72
Beam dia.	2.0	2.2	2.5	2.8	3.1	3.4	3.6	3.9	4.2	m
lux	2443	1870	1478	1197	989	831	708	611	532	
Distance	14	16	18	20	22	24	26	28	30	m

Wide focus										
Beam dia.	2.3	3.1	3.9	4.7	5.4	6.2	7.0	7.8	8.6	m
lux	5556	3152	2000	1389	1020	781	617	500	413	
Distance	6	8	10	12	14	16	18	20	22	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

tono[®] 8/22 plus

2000W


profile spotlight

part number: ☒ 10904020 ☐ 10904021 ☐ 10904022

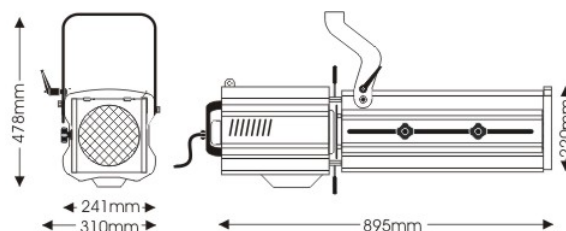

This powerful 2Kw narrow-angle profile spotlight is designed for use in larger venues which demand exceptional beam quality and gobo projection. In addition to a double condenser optical system, features include an 8° - 22° zoom focus, rotating gate, a cranked fork and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also supplied as standard.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.