

TONO 30/55


10903040 black



COMPATIBLE LAMPS

CP72 GY16 2000W 230V/240V 3200K 480 hrs

LDR recommends Philips lamps

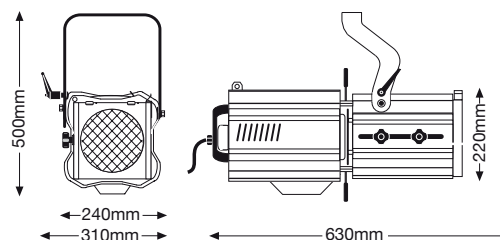

ACCESSORIES

- 20100106 colour frame, black
- 20100706 iris diaphragm
- 20100806 gobo holder, A/B size
- 20100900 hook clamp
- 20101300 safety bond
- 20106019 colour scroller Xpress 19
- 20600006 plate 185x185mm for Xpress 19

PRODUCT SPECS

lens type
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

colour frame
185x185mm

throw
4-12m

beam angle
30°-55°

weight
13,7 kg

Extremely wide-angle 2000W profile spotlight for very close projection in larger venues. It incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 2000W ad angolo estremamente largo progettato per l'impiego su fronte scena in grandi installazioni che richiedano un'eccezionale qualità ottica.

Dispone di doppio condensatore ottico, alloggiamento ghigliottine girevole, blocco forcella a leva e doppio microinterruttore.

Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatici e 2m cavo di alimentazione.

PHOTOMETRIC DATA CP72

NARROW	m Ø	2,1	2,7	3,2	3,8	4,3	4,8	5,4	5,9	6,4
	lux	6.263	4.008	2.783	2.045	1.566	1.237	1.002	828	696
	m	4	5	6	7	8	9	10	11	12
WIDE	m Ø	4,2	5,2	6,2	7,3	8,3	9,4	10,4	11,5	12,5
	lux	2.406	1.540	1.069	786	602	475	385	318	267
	m	4	5	6	7	8	9	10	11	12