

- 10853020 black
- 10853021 white
- 10853022 silver



### COMPATIBLE LAMPS

<b>CP67</b>	GX9.5	650W	230V/240V	3200K	120 hrs
<b>T21</b>	GX9.5	650W	230V/240V	3000K	900 hrs
<b>CP70</b>	GX9.5	1000W	230V/240V	3200K	240 hrs
<b>T19</b>	GX9.5	1000W	230V/240V	3050K	900 hrs
<b>CP90</b>	GX9.5	1200W	230V/240V	3200K	240 hrs
<b>T29</b>	GX9.5	1200W	230V/240V	3000K	480 hrs


LDR recommends Philips lamps

### ACCESSORIES

- 20100106 colour frame, black
- 20100706 iris diaphragm
- 20100806 gobo holder, A/B size
- 20100900 hook clamp
- 20101300 safety bond
- 20106019 colour scroller Xpress 19
- 20600006 plate 185x185mm for Xpress 19

A high-specification 1000/1200W profile spotlight with advanced features including a double condenser optical system for extremely sharp gobo projection, rotating 4-shutter gate, 8° to 22° narrow-angle zoom focus, a double-microswitch interlock for safe lamp replacement, easy access for lens cleaning and a cranked fork. Ideal for front-of-house projection positions. A colour frame, safety guard, 4 beam shutters and 2m mains cable are all included as standard.

Sagomatore da 1000/1200W ad angolo stretto e dall'elevato profilo tecnico-qualitativo. Dispone di ottica primaria a doppio condensatore per una precisa proiezione gobo, di gruppo centrale girevole, ottica secondaria a tre elementi, doppio microinterruttore e blocco forcella a leva. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.

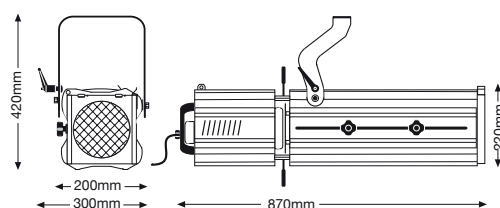

### PRODUCT SPECS

**optical system**  
double condenser+zoom

**reflector**  
68mm dia. glass

**microswitch**  
double-pole

**colour frame**  
185x185mm

**throw**  
5-25m

**beam angle**  
8°-22°

**weight**  
14,3 kg

### PHOTOMETRIC DATA CP90

	m Ø	1,7	1,8	2	2,1	2,2	2,4	2,5	2,7	2,8
<b>NARROW</b>	lux	2.118	1.805	1.556	1.356	1.191	1.055	941	845	763
	m	12	13	14	15	16	17	18	19	20
<b>WIDE</b>	m Ø	1,9	2,3	2,7	3,1	3,5	3,9	4,3	4,7	5,1
	lux	6.160	4.278	3.143	2.406	1.901	1.540	1.273	1.069	911
	m	5	6	7	8	9	10	11	12	13