




COMPATIBLE LAMPS

CP72 GY16 2000W 230V/240V 3200K 480 hrs

LDR recommends Philips lamps

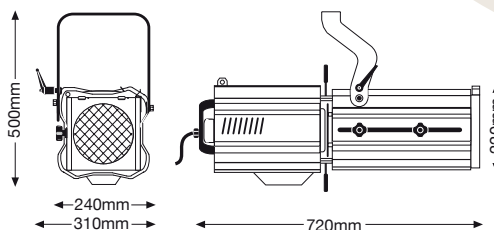

ACCESSORIES

- 20100106 colour frame, black
- 20100706 iris diaphragm
- 20100806 gobo holder, A/B size
- 20100900 hook clamp
- 20101300 safety bond
- 20106019 colour scroller Xpress 19
- 20600006 plate 185x185mm for Xpress 19

PRODUCT SPECS

optical system
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

colour frame
185x185mm

throw
6-23m

beam angle
18°-36°

weight
14 kg

For closer projection in larger venues, this wide-angle 18° - 36° 2000W spotlight incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement. A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 2000W ad angolo largo per l'impiego in grandi installazioni che richiedano un'eccezionale qualità ottica. Oltre che di un doppio condensatore ottico dispone di alloggiamento ghigliottine girevole, blocco forcella a leva e doppio microinterruttore. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatici e 2m cavo di alimentazione.

PHOTOMETRIC DATA CP72

	m Ø	2,5	3,2	3,8	4,4	5,1	5,7	6,3	7,0	7,6
NARROW	lux	4.328	2.770	1.924	1.413	1.082	855	693	572	481
	m	8	10	12	14	16	18	20	22	24
	m Ø	3,9	5,2	6,5	7,8	9,1	10,4	11,7	13,0	14,3
WIDE	lux	5.556	3.152	2000	1389	1020	781	617	500	413
	m	6	8	10	12	14	16	18	20	22