


CANTO 1200 msd/msr MK2



10857180	230V black	10857280	250V black
10857181	230V white	10857281	250V white
K10857180	230V kit	K10857280	250V kit
11857180	120V black	11857280	100V black
11857181	120V white	11857281	100V white
K11857180	120V kit	K11857280	100V kit

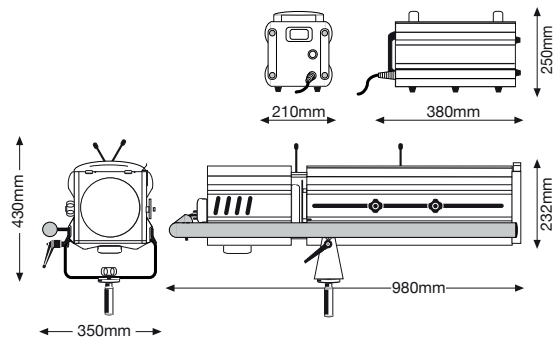

The most popular in the range, Canto 1200 MSD/MSR produces a well-defined, flat-field projection, ideal for use in medium-large-scale venues. It features a large, user-friendly side handle, strong mechanics and excellent optics. Standard delivery includes an external ballast, iris, mechanical dimmer, spigot, colour frame and 2m mains cable.

Il best-seller della gamma, Canto 1200 MSD/MSR produce un fascio di luce estremamente preciso, che lo rende perfetto per uso in proiezioni sulla media-lunga distanza.

Viene fornito di serie completo di unità ballast esterna, diaframma ad iride, dimmer meccanico, perno per stativo, telaio porta-gelatina e 2m cavo di alimentazione.

PRODUCT SPECS

lens type
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

ballast
external, PFC

colour frame
185x185mm

throw
10-40m

beam angle
8°-22°

voltage
100V/120V/230V/250V

weight
19,8 kg - ballast 16,5/28 (120V)
81,6 kg - kit 230/250V
90,8 kg - kit 100V

COMPATIBLE LAMPS

Philips msr 1200 G22 5900K 800 hrs

Philips msr 1200/2 G22 7200K 800 hrs

Philips msd 1200 G22 6000K 3000 hrs

LDR recommends Philips lamps

ACCESSORIES

20100106	colour frame
20100707	iris diaphragm
20100708	black-out iris diaphragm
20100807	gobo-holder, A/B size
20105106	5-col. colour changer, black
20105106B	5-col. colour changer, white
20102200	29mm dia spigot
20102401	black followspot tripod
20102402	chrome followspot tripod
20102900	stirrup-kit for suspension
20107180	flight-case with braking wheels, colour changer on
20107070	kit one-hand control iris+dowser
20109106	kit colour frame + front runners Canto kit

SPECIALS

CANTO 1200 KIT includes/comprende

followspot	seguipersona
colour changer on	c. colori montato
black tripod	stativo nero
MSR 1200 lamp	lampada MSR 1200
flight case	flight case

PHOTOMETRIC DATA 1200 MSD

	m Ø	2,5	2,7	2,9	3,1	3,3	3,6	3,8	4,0	4,2
NARROW	lux	3.863	3.291	2.838	2.472	2.173	1.925	1.717	1.541	1.391
	m	24	26	28	30	32	34	36	38	40
WIDE	m Ø	2,6	3,7	3,7	4,2	4,7	5,3	5,8	6,3	6,8
	lux	5.563	3.863	2.838	2.173	1.717	1.391	1.149	966	823
	m	10	12	14	16	18	20	22	24	26