

SUONO D 10/28 250W




- 10203020 black
- 10203021 white
- 10203022 silver



COMPATIBLE LAMPS

Philips MSD 250/2 GY9.5 8500K 3000 hrs

LDR recommends Philips lamps

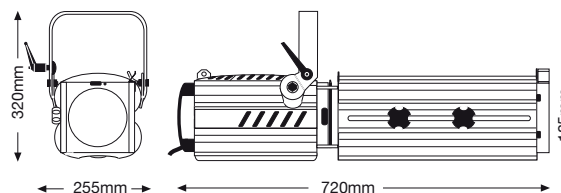

PRODUCT SPECS

optical system

double condenser+zoom

reflector

55mm dia. glass

microswitch

no

colour frame

150x150mm

throw

2-20 m

beam angle

10°-28°

voltage

208V / 230V / 240V

weight

12,4 kg

ACCESSORIES

- 20100103 colour frame, black
- 20100103B colour frame, white
- 20100103C colour frame, silver
- 20100707 iris diaphragm
- 20100801 gobo holder, M/D size
- 20100900 hook clamp
- 20101300 safety bond

Discharge profile spotlight designed for 250W MSD lamps. Ideal for longer throw applications in display, retail and architectural lighting where the versatility and precision of a theatrical luminaire combined with a high colour temperature are required. Supplied with a built-in ballast, colour frame, 4 shutter blades and 1,5m mains cable. Available to special order in any colour from the RAL range.

Sagomatore a scarica per lampade 250MSD. Ideale per l'illuminazione su distanze medio-lunghe in ambiente architeturale dove si richiedano la versatilità e precisione di un illuminatore teatrale ed al contempo una elevata temperatura di colore. Viene fornito di serie completo di ballast interno, telaio porta-gelatina, 4 ghigliottine sagomatrici e 1,5m cavo di alimentazione. A richiesta disponibile in qualsiasi colore della gamma RAL.

PHOTOMETRIC DATA MSD 250/2

NARROW	m Ø	0,3	0,5	0,7	0,9	1,0	1,4	1,7	2,1	2,4
	lux	12.650	5.622	3.163	2.024	1.406	791	506	351	258
	m	2	3	4	5	6	8	10	12	14
WIDE	m Ø	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0
	lux	10.700	4.756	2.675	1.712	1.189	873	669	528	428
	m	2	3	4	5	6	7	8	9	10