

TONO 8/22

10903020 black


LDR
luci della ribalta



COMPATIBLE LAMPS

CP72 GY16 2000W 230V/240V 3200K 48ohrs

LDR recommends Philips lamps

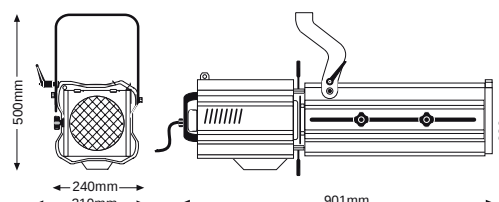

ACCESSORIES

20100106	colour frame, black
20100706	iris diaphragm
20100806	gobo holder, A/B size
20100900	hook clamp
20101100	alu-grip clamp
20101200	safety bond
20106019	colour scroller Xpress 19

PRODUCT SPECS

lens type
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

colour frame
185x185mm

throw
6-30m

beam angle
8°-22°

weight
14,7 kg

This powerful 2Kw narrow-angle profile spotlight is designed for use in larger venues which demand exceptional beam quality and gobo projection. In addition to a double condenser optical system, features include an 8° - 22° zoom focus, rotating gate, a cranked fork and a double-microswitch interlock for safe lamp replacement. A colour frame, safety guard, 4 beam shutters and 2m mains cable are also supplied as standard.

Sagomatore da 2000W ad angolo stretto progettato per l'impiego in grandi installazioni che richiedano un'eccezionale qualità ottica ed un'estremamente nitida proiezione gobo. Oltre che di un doppio condensatore ottico dispone di angolo di proiezione tra 8° e 22°, alloggiamento ghigliottine girevole, blocco forcilla a leva e doppio microinterruttore. Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.



PHOTOMETRIC DATA CP72

narrow	m Ø	2,0	2,2	2,5	2,8	3,1	3,4	3,6	3,9	4,2
	lux	2.443	1.870	1.478	1.197	989	831	708	611	532
	m	14	16	18	20	22	24	26	28	30
wide	m Ø	2,3	3,1	3,9	4,7	5,4	6,2	7,0	7,8	8,6
	lux	5.556	3.152	2.000	1.389	1.020	781	617	500	413
	m	6	8	10	12	14	16	18	20	22

