

Application

Beam style	well-defined, flat field profile projection
Suitable for	medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	5 – 25m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3 x 1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black, white or silver epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	14.3kg / 16.8kg
Packed volume	0.17m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on bottom of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia. and softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

Lamp types

650W 230V	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W 230V	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W 230V	CP90 3200K 240 hrs / T29 3000K 480 hrs
1000W 115/120V	T11 3050K 750 hrs GE88515

Accessories

Spare metal colour frame	■ 20100106 □ 20100106B ■ 20100106C
Spare safety guard	■ 20100206 □ 20100206B ■ 20100206C
Iris diaphragm	20100707
Gobo holder, A/B size, metal	20100807
Hook clamp	20100900
Safety bond	20101300

Photometric data

Narrow focus										CP90
Beam dia.	1.7	1.8	2	2.1	2.2	2.4	2.5	2.7	2.8	m
lux	2118	1805	1556	1356	1191	1055	941	845	763	
Distance	12	13	14	15	16	17	18	19	20	m

Wide focus										
Beam dia.	1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.1	m
lux	6160	4278	3143	2406	1901	1540	1273	1069	911	
Distance	5	6	7	8	9	10	11	12	13	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

nota[®] 8/22 plus

650 - 1200W


profile spotlight

part number : ■ 10854020 □ 10854021 ■ 10854022

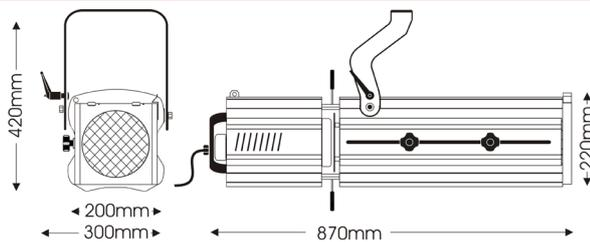

A high-specification 1000/1200W profile spotlight with advanced features including a double condenser optical system for extremely sharp gobo projection, rotating 4-shutter gate, 8° to 22° narrow-angle zoom focus, a double-microswitch interlock for safe lamp replacement, easy access for lens cleaning and a cranked fork. Ideal for front-of-house projection positions.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are all included as standard.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.