

Application

Beam style	asymmetric flood
Suitable for	small-scale theatre, batten cyclorama lighting
Specification level	professional range
Typical throw distance	2 - 5m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	500W
Lamp base	R7s
Auto-disconnect	single-pole microswitch
Cable/connection	1.5m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment, may be coupled together with identical units to create a 2/3/4 compartment batten, available accessories for domino assembling.
Reflector	asymmetrical, aluminium
Mounting & suspension	supplied without stirrup- see list of separate hanging accessories available
Weight/Packed weight	2,4kg / 2,9kg
Packed volume	0.017m ³
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety glass	supplied
Colour frame	metal, 244 x 195mm supplied
Lamp access	front access

Operational specifications

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side

Lamp types

160W / 200W	K11 R7s 230V/240V 3200K 2.000hrs
240W / 300W	K9 R7s 230V/240V 3200K 2.000hrs
400W / 500W	K1 R7s 230V/240V 3200K 2.000hrs

Accessories

Spare metal colour frame	■ 20100120 □ 20100120B ■ 20100120C
3-leaf barndoor	■ 20100620 □ 20100620B ■ 20100620C □ 20100620D ■ 20100620E
2-leaf barndoor	■ 20100520 □ 20100520B ■ 20100520C □ 20100520D ■ 20100520E
Clear safety glass	20101420
Safety guard	20100220
Kit for square mounting	20101920
Stirrup kit 1 Rima	20102621
Kit linear mounting 2 Rima	20102622
Kit linear mounting 3 Rima	20102623
Kit linear mounting 4 Rima	20102624
Hook clamp	20100900
Safety bond	20101300

Photometric data

Horizontal											ES400
Beam dia.	3.1	4.7	6.3	7.8	9.4	10.9	12.5	14.1	15.6	m	
lux	1585	704	396	254	176	129	99	78	63		
Distance	2	3	4	5	6	7	8	9	10	m	

Vertical											
Beam dia.	1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5	m	
lux	2151	956	538	344	239	176	134	106	86		
Distance	2	3	4	5	6	7	8	9	10	m	


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

rima[®] A500 Pro no stirrup

160 - 500W

asymmetric floodlight

part number: ■ 10516150 □ 10516151 ■ 10516152

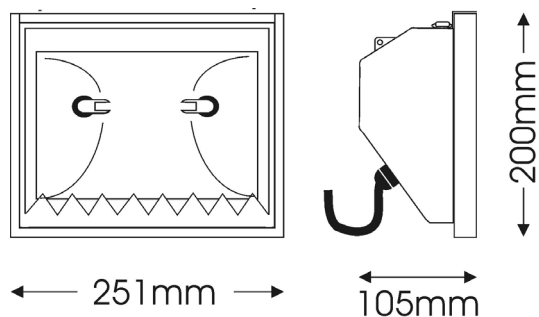

Stylish and high specification 500W asymmetric floodlights, ideal for professional usage in all cyclorama-type lighting applications.

The modular design enables several units to be coupled together to form a single compartment or square batten. Improved design prevents any light spill. A colour frame, single microswitch interlock for safe lamp replacement, a safety glass and 1.5m mains cable are included in standard delivery.

Available to special order with extended front chassis for longer gel life.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
www.ldr.it info@ldr.it

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.